


KHA 8

Profilschiene 40x22 mm, gelocht, Funktionserhalt

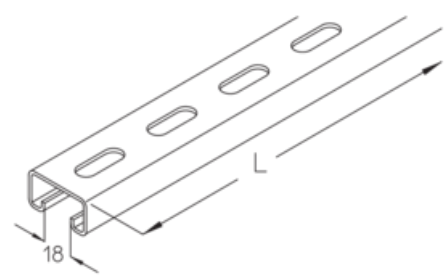

Brandschutz



Stahl, stück-/tauchfeuerverzinkt

Artikel	H _p	B _p	L	t	G
KHA 8-01F Profilschiene gelocht 40/22x2,0	22 mm	40 mm	100 mm	2 mm	0,154 kg
KHA 8-02F Profilschiene gelocht 40/22x2,0	22 mm	40 mm	200 mm	2 mm	0,310 kg
KHA 8-03F Profilschiene gelocht 40/22x2,0	22 mm	40 mm	300 mm	2 mm	0,460 kg
KHA 8-04F Profilschiene gelocht 40/22x2,0	22 mm	40 mm	400 mm	2 mm	0,620 kg
KHA 8-05F Profilschiene gelocht 40/22x2,0	22 mm	40 mm	500 mm	2 mm	0,770 kg
KHA 8-06F Profilschiene gelocht 40/22x2,0	22 mm	40 mm	600 mm	2 mm	0,930 kg
KHA 8-07F Profilschiene gelocht 40/22x2,0	22 mm	40 mm	700 mm	2 mm	1,080 kg

H_p: Profilhöhe
B_p: Profilbreite
L: Länge
t: Materialstärke Profile
G: Gewicht je Lagermengeneinheit



DETAIL- UND ANWENDUNGSBILDER

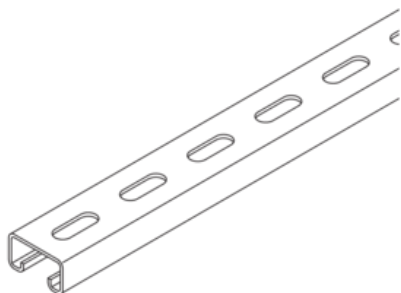

$$\begin{aligned}W_y &= 1.05 \text{ cm}^3 \\W_z &= 2.24 \text{ cm}^3 \\I_y &= 1.18 \text{ cm}^4 \\I_z &= 4.48 \text{ cm}^4\end{aligned}$$

