


B 3

28x12 mm profile rail, unperforated

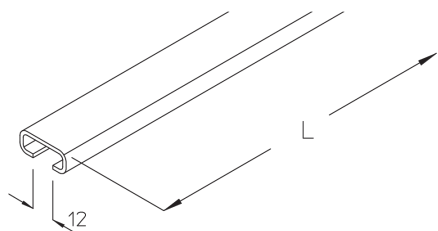

The profile rail B 3 is unperforated and consists of a C profile 28 x 12 mm with a slot width of 12 mm (material thickness = 2 mm). We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications. It is available in lengths of 3000 or 6000 mm.




Artikel	Typ	H _p	B _p	L	t	W
B 3-30B	Channel B 3-30B	12 mm	28 mm	3000 mm	2.00 mm	2.500 kg
B 3-60B	Channel B 3-60B	12 mm	28 mm	6000 mm	2.00 mm	5.328 kg

Artikel	Typ	H _p	B _p	L	t	W
B 3-30F	Channel B 3-30F	12 mm	28 mm	3000 mm	2.00 mm	2.700 kg
B 3-60F	Channel B 3-60F	12 mm	28 mm	6000 mm	2.00 mm	5.300 kg

Artikel	Typ	H _p	B _p	L	t	W
B 3-30E4	Channel B 3-30E4	12 mm	28 mm	3000 mm	2.00 mm	2.500 kg
B 3-60E4	Channel B 3-60E4	12 mm	28 mm	6000 mm	2.00 mm	5.430 kg

DETAIL- UND ANWENDUNGSBILDER



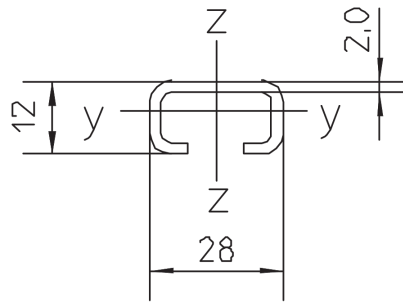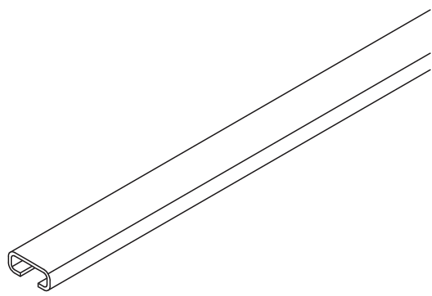

$$\begin{aligned}W_y &= 0.29 \text{ cm}^3 \\W_z &= 0.80 \text{ cm}^3 \\I_y &= 0.21 \text{ cm}^4 \\I_z &= 1.12 \text{ cm}^4\end{aligned}$$

OPTIONALES ZUBEHÖR

HS12, AM 12

