


B 6

28x15 mm profile rail, unperforated

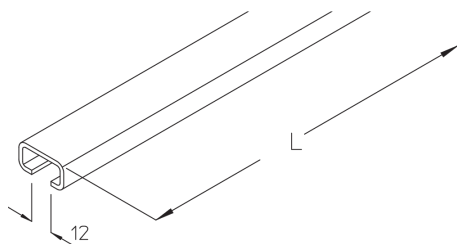

The profile rail B 6 is unperforated and consists of a C profile 28 x 15 mm with a slot width of 12 mm (material thickness = 2.3 mm). We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications. It is available in lengths of 3000 or 6000 mm.

Artikel	Typ	H _p	B _p	L	t	W
B 6-30B	Channel B 6-30B	15 mm	28 mm	3000 mm	2.30 mm	3.150 kg
B 6-60B	Channel B 6-60B	15 mm	28 mm	6000 mm	2.30 mm	6.672 kg


Artikel	Typ	H _p	B _p	L	t	W
B 6-30F	Channel B 6-30F	15 mm	28 mm	3000 mm	2.30 mm	3.430 kg
B 6-60F	Channel B 6-60F	15 mm	28 mm	6000 mm	2.30 mm	7.338 kg

Artikel	Typ	H _p	B _p	L	t	W
B 6-30E	Channel B 6-30E	15 mm	28 mm	3000 mm	2.30 mm	3.150 kg
B 6-60E	Channel B 6-60E	15 mm	28 mm	6000 mm	2.30 mm	6.804 kg

Artikel	Typ	H _p	B _p	L	t	W
B 6-30E4	Channel B 6-30E4	15 mm	28 mm	3000 mm	2.30 mm	3.150 kg
B 6-60E4	Channel B 6-60E4	15 mm	28 mm	6000 mm	2.30 mm	6.804 kg



DETAIL- UND ANWENDUNGSBILDER

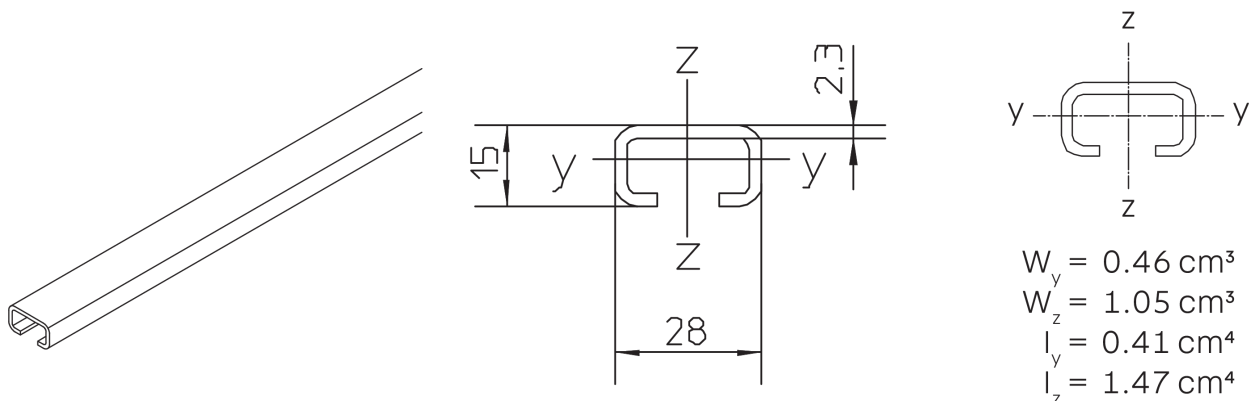

OPTIONALES ZUBEHÖR

HS12, AM 12

