

BKAA 110

Floor duct add-on tee, height = 110 mm

The BKAA 110 floor duct attachment branch with integrated connectors allows the direction of cable routing to be changed horizontally by 90°. It is 110 mm high and 100 to 600 mm wide. It is made of sendzimir hot-dip galvanised steel. To dissipate vertical live loads, one separating strip must be installed in the floor duct for widths ≥ 300 mm and two separating strips for widths ≥ 500 mm. The side rail of the main floor duct is cut out accordingly at the point where the connecting floor duct will branch off. The BKAA attachment branch is positioned and bolted in place at this point. The branching floor duct can then be pushed in.

Steel, pre-galvanised/Sendzimir process

Article	H	B	t	W	G
BKAA 110-10S Floor duct attachment branch, 90° T-branch,	110 mm	100 mm	2.00 mm	90°	1.348 kg
BKAA 110-15S Floor duct attachment branch, 90° T-branch,	110 mm	150 mm	2.00 mm	90°	1.488 kg
BKAA 110-20S Floor duct attachment branch, 90° T-branch,	110 mm	200 mm	2.00 mm	90°	1.568 kg
BKAA 110-30S Floor duct attachment branch, 90° T-branch,	110 mm	300 mm	2.00 mm	90°	1.788 kg
BKAA 110-40S Floor duct attachment branch, 90° T-branch,	110 mm	400 mm	2.00 mm	90°	1.998 kg
BKAA 110-50S Floor duct attachment branch, 90° T-branch,	110 mm	500 mm	2.00 mm	90°	2.218 kg
BKAA 110-60S Floor duct attachment branch, 90° T-branch,	110 mm	600 mm	2.00 mm	90°	2.438 kg

H: height
B: width
t: material thickness
W: Angle
G: Weight per storage unit

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 13.11.2026. Errors and technical changes reserved

DETAIL AND APPLICATION IMAGES



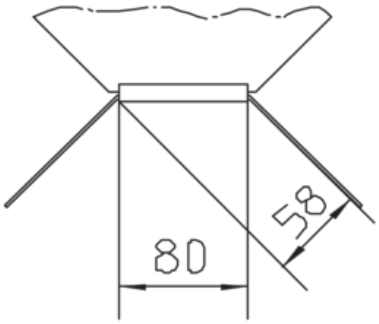

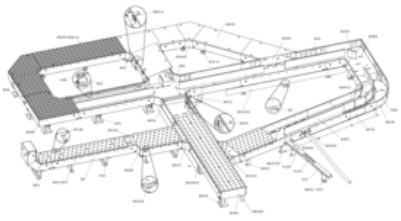

OPTIONAL ACCESSORIES

BKAADR, BKAADR-RHP, BKAADR-WZB AL, BKRTV 110, BKDS 110

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 13.11.2026. Errors and technical changes reserved