


## BKKDR-RHP

### Floor duct crossing cover with anti-slip embossing




The BKKDR-RHP floor duct crossing cover is placed on top of the floor duct crossing BKK and protects cables and supply lines from flying sparks and other mechanical influences. It is 100 to 600 mm wide corresponding to the crossing. The floor duct crossing cover is made of sendzimir hot-dip galvanised steel with slip resistance class R12. With a maximum compartment size of 200 mm, we guarantee a tested load capacity of 5.00 kN according to EN 50085-2-2. They come with pre-assembled turning bolts.

DIN

| Artikel       | Typ                       | B      | t       | P <sub>max</sub> | W        |
|---------------|---------------------------|--------|---------|------------------|----------|
| BKKDR-RHP 10S | Floor duct crossing cover | 100 mm | 2.00 mm | 5.00 kN          | 0.760 kg |
| BKKDR-RHP 15S | Floor duct crossing cover | 150 mm | 2.00 mm | 5.00 kN          | 1.140 kg |
| BKKDR-RHP 20S | Floor duct crossing cover | 200 mm | 2.00 mm | 5.00 kN          | 1.600 kg |
| BKKDR-RHP 30S | Floor duct crossing cover | 300 mm | 2.00 mm | 5.00 kN          | 2.750 kg |
| BKKDR-RHP 40S | Floor duct crossing cover | 400 mm | 2.00 mm | 5.00 kN          | 4.210 kg |
| BKKDR-RHP 50S | Floor duct crossing cover | 500 mm | 2.00 mm | 5.00 kN          | 5.990 kg |
| BKKDR-RHP 60S | Floor duct crossing cover | 600 mm | 2.00 mm | 5.00 kN          | 8.080 kg |

## DETAIL- UND ANWENDUNGSBILDER



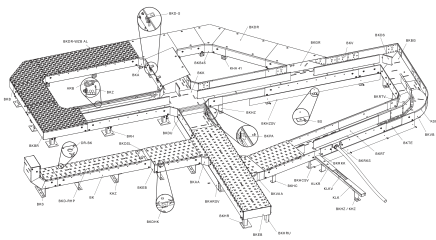

## OPTIONALES ZUBEHÖR

DR-BK, BKDU 100, BKDU 110

DIN

Load requirements according to: EN 50085-2-2

