


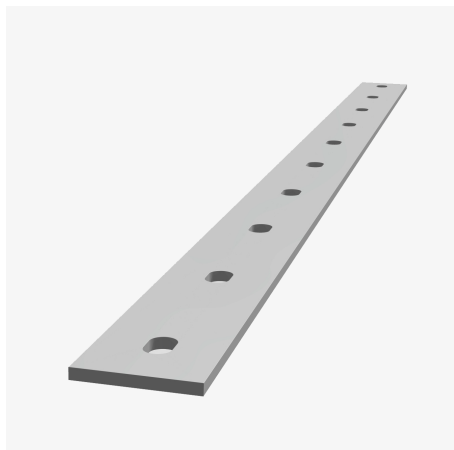

Clamping Rail

For KUNEX® clamp joint

The Clamping Rail has slots every 150 mm and is used to press the clamp joint tape against the existing building. It is available in the types 80 × 8 (16/30, 20/30), 100 × 10 (24/38), in a galvanised version (l=1450 mm) or made of stainless steel V4A (l=1300 mm).

Artikel	Typ	L	Diameter slot	Number of slots	W
121000002823	Kunex K Schiene 080 20 A4	1300 mm	20/30 mm	9 STK	6.800 kg
121000002824	Kunex K Schiene 080 20 VZ	1450 mm	20/30 mm	10 STK	6.800 kg
121000002825	Kunex K Schiene 080 V4A	1300 mm	16/30 mm	9 STK	6.800 kg
121000002826	Kunex K Schiene 080 verz	1450 mm	16/30 mm	10 STK	6.800 kg

