


DSAUGRSP 2

Wire suspension with cross anchor and UniGrip central exit

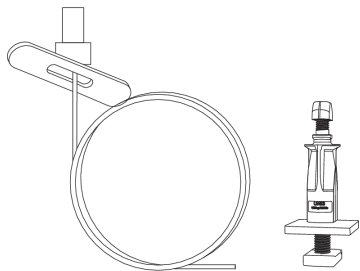

The wire suspension DSAUGRSP 2 with cross anchor and UniGrip central exit is used for suspending cable trays and mesh cable trays from ceilings. It is made of galvanised steel and is available in lengths from 1000 to 10,000 mm. The maximum load is 0.54 kN (Gripple load class 2).

Artikel	Typ	L	P _{max}	W
DSAUGRSP 210GV	Wire rope suspension	10000 mm	0.54 kN	0.680 kg
DSAUGRSP 21GV	Wire rope suspension	1000 mm	0.54 kN	0.350 kg
DSAUGRSP 22GV	Wire rope suspension	2000 mm	0.54 kN	0.370 kg
DSAUGRSP 23GV	Wire rope suspension	3000 mm	0.54 kN	0.390 kg
DSAUGRSP 24GV	Wire rope suspension	4000 mm	0.54 kN	0.410 kg
DSAUGRSP 25GV	Wire rope suspension	5000 mm	0.54 kN	0.410 kg

