


DSAXPFR 2

Wire suspension with loop and express closure

The wire suspension DSAXPFR 2 with loop and express closure is used for suspending cable trays and mesh cable trays from ceilings. It is made of galvanised steel and is available in lengths from 1000 to 10,000 mm. The maximum load is 0.44 kN (Gripple load class 2).

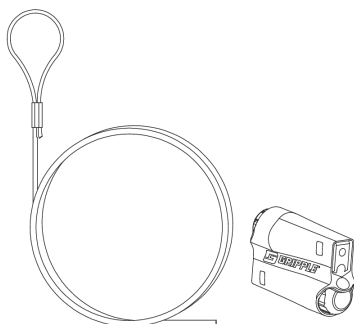

Artikel	Typ	L	P _{max}	W
DSAXPFR 210GV	Chain KNK	10000 mm	0.44 kN	0.208 kg
DSAXPFR 21GV	Wire rope suspension	1000 mm	0.44 kN	0.049 kg
DSAXPFR 22GV	Chain KNK	2000 mm	0.44 kN	0.064 kg
DSAXPFR 23GV	Chain KNK	3000 mm	0.44 kN	0.080 kg
DSAXPFR 24GV	Chain KNK	4000 mm	0.44 kN	0.095 kg
DSAXPFR 25GV	Chain KNK	5000 mm	0.44 kN	0.116 kg

