


DSAXPSP 2

Wire suspension with cross anchor and express closure

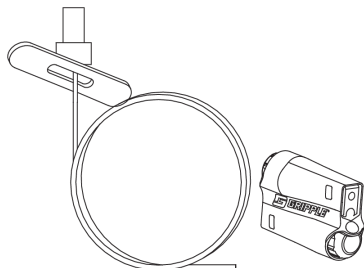

The wire suspension DSAXPSP 2 with cross anchor and express closure is used for suspending cable trays and mesh cable trays from ceilings. It is made of galvanised steel and is available in lengths from 1000 to 10,000 mm. The maximum load is 0.44 kN (Gripple load class 2).

Artikel	Typ	L	P _{max}	W
DSAXPSP 210GV	Wire rope suspension	10000 mm	0.44 kN	0.210 kg
DSAXPSP 21GV	Wire rope suspension	1000 mm	0.44 kN	0.047 kg
DSAXPSP 22GV	Wire rope suspension	2000 mm	0.44 kN	0.065 kg
DSAXPSP 23GV	Wire rope suspension	3000 mm	0.44 kN	0.083 kg
DSAXPSP 24GV	Wire rope suspension	4000 mm	0.44 kN	0.100 kg
DSAXPSP 25GV	Wire rope suspension	5000 mm	0.44 kN	0.123 kg

