




FERBOX® B05

Double-row rebend connection

FERBOX® B05 double-row rebend connections are used for the frictional connection and reinforcement of reinforced concrete parts from two different casting stages. These are solutions for walls from 145 mm thick. They have 30 mm concrete cover and the highest joint category – Interlocked – in transverse and longitudinal directions. Their studded reinforcement box and cover are made of galvanised sheet metal and the reinforcement stirrups are made of B500 B or stainless steel. The stirrups are U-shaped for the first casting section. They are available with boxes 800 or 1200 mm long, 110 to 260 mm wide and have bars with standard diameters of 8 to 12 mm. Other versions and special solutions are available on request.

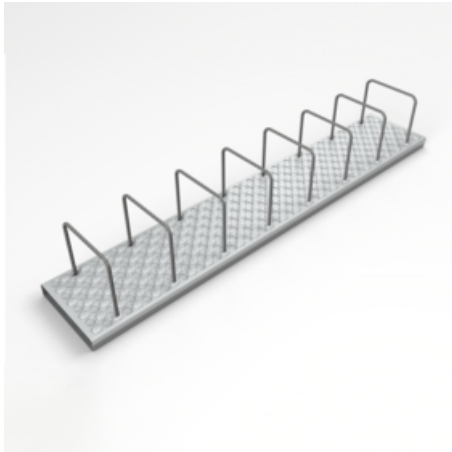

European Technical Assessment: ETA-20/0842

Article	G
512100021970 Ferb B05 110 08 200 1.20	3.948 kg
512100021971 Ferb B05 110 10 150 1.20	7.056 kg
512100021974 Ferb B05 110 12 200 1.20	8.328 kg
512100021977 Ferb B05 135 08 200 1.20	4.392 kg
512100021979 Ferb B05 135 10 150 1.20	7.560 kg
512100021980 Ferb B05 135 10 200 1.20	6.156 kg
512100021983 Ferb B05 135 12 200 1.20	8.928 kg
512100021984 Ferb B05 160 08 100 1.20	7.152 kg
512100021986 Ferb B05 160 08 200 1.20	4.596 kg
512100021987 Ferb B05 160 10 100 1.20	10.692 kg
512100021989 Ferb B05 160 10 200 1.20	6.396 kg
512100021992 Ferb B05 160 12 200 1.20	9.228 kg
512100021998 Ferb B05 185 10 200 1.20	6.624 kg



PRODUCT INFORMATION

Article	G
512100022001 Ferb B05 185 12 200 1.20	9.528 kg
512100022002 Ferb B05 210 08 100 1.20	7.668 kg
512100022004 Ferb B05 210 08 200 1.20	4.992 kg
512100022006 Ferb B05 210 10 150 1.20	8.304 kg
512100022010 Ferb B05 210 12 200 1.20	9.768 kg
512100022011 Ferb B05 235 08 100 1.20	7.824 kg
512100022012 Ferb B05 235 08 150 1.20	6.060 kg
512100022013 Ferb B05 235 08 200 1.20	5.172 kg
512100022014 Ferb B05 235 10 100 1.20	11.544 kg
512100022016 Ferb B05 235 10 200 1.20	7.044 kg
512100022017 Ferb B05 235 12 100 1.20	17.352 kg
512100022019 Ferb B05 235 12 200 1.20	10.020 kg
512100022020 Ferb B05 260 08 100 1.20	9.636 kg
512100022021 Ferb B05 260 08 150 1.20	7.776 kg
512100022022 Ferb B05 260 08 200 1.20	6.840 kg
512100022023 Ferb B05 260 10 100 1.20	13.764 kg
512100022024 Ferb B05 260 10 150 1.20	10.536 kg
512100022025 Ferb B05 260 10 200 1.20	8.916 kg
512100022027 Ferb B05 260 12 150 1.20	14.664 kg
512100022028 Ferb B05 260 12 200 1.20	12.096 kg



G: Weight per storage unit



DETAIL AND APPLICATION IMAGES

