


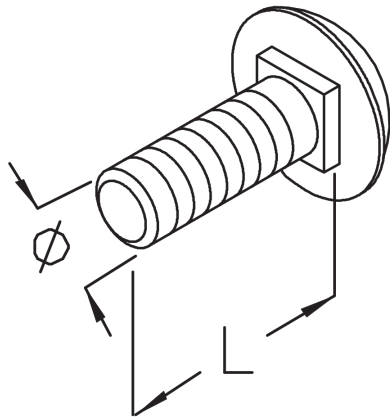

FRSV

Round-head bolt with short square, DIN 603

The round-head bolt with a short square FRSV (in line with DIN 603) is used in numerous applications, including the assembly of fixed and floating bearings for cable ladders and trays, the attachment of storm safety brackets or the assembly of mesh cable tray connectors. The round-head bolt is available in lengths from 12 to 20 mm and with threads M6 and M10. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

Artikel	Typ	L	D	d	Ø	W
FRSV 10X20F	Cup square neck bolt FRSV 10X20F	20 mm	24 mm	2.5 mm	10 mm	0.022 kg

Artikel	Typ	L	D	d	Ø	W
FRSV 10X20	Cup square neck bolt FRSV 10X20	20 mm	24 mm	2.5 mm	10 mm	0.022 kg
FRSV 6X12	Cup square neck bolt FRSV 6X12	12 mm	16 mm	1.5 mm	6 mm	0.005 kg
FRSV 6X16	Cup square neck bolt FRSV 6X16	16 mm	16 mm	1.5 mm	6 mm	0.006 kg
FRSV 8X16	Cup square neck bolt FRSV 8X16	16 mm	20 mm	2 mm	8 mm	0.012 kg

Artikel	Typ	L	D	d	Ø	W
FRSV 10X20E	Cup square neck bolt FRSV 10X20E	20 mm	24 mm	2.5 mm	10 mm	0.022 kg
FRSV 6X12E	Cup square neck bolt FRSV 6X12E	12 mm	16 mm	1.5 mm	6 mm	0.005 kg
FRSV 6X16E	Cup square neck bolt FRSV 6X16E	16 mm	16 mm	1.5 mm	6 mm	0.006 kg
FRSV 8X16E	Cup square neck bolt FRSV 8X16E	16 mm	20 mm	2 mm	8 mm	0.012 kg

Artikel	Typ	L	D	d	Ø	W
FRSV 10X20E4	Cup square neck bolt FRSV 10X20E4	20 mm	24 mm	2.5 mm	10 mm	0.024 kg
FRSV 6X12E4	Truss-head bolts	12 mm	16 mm	1.5 mm	6 mm	0.006 kg



Artikel	Typ	L	D	d	Ø	W
FRSV 6X16E4	cup square neck bolt FRSV 6x16E4	16 mm	16 mm	1.5 mm	6 mm	0.006 kg
FRSV 8X16E4	Cup square neck bolt FRSV 8X16E	16 mm	20 mm	2.0 mm	8 mm	0.012 kg

DETAIL- UND ANWENDUNGSBILDER

