


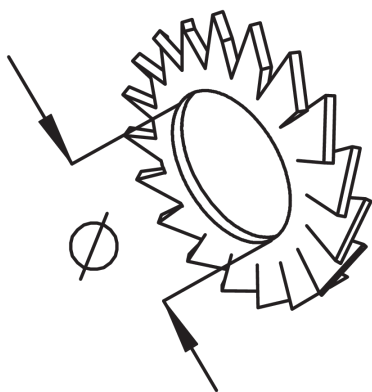

FS
Serrated washer

The serrated lock washers FS lock screw connections in place with a positive fit. They have an inner diameter of 6.4 to 12.5 mm. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

Artikel	Typ	D	Ø	W
FS 10	Serrated lock washer FS 10	18 mm	10.5 mm	0.001 kg
FS 12	Serrated lock washer FS 12	20.5 mm	12.5 mm	0.002 kg
FS 6	Serrated lock washer FS 6	11 mm	6.4 mm	0.000 kg
FS 8	Serrated lock washer FS 8	14 mm	8.2 mm	0.001 kg

Artikel	Typ	D	Ø	W
FS 10E	Serrated lock washer FS 10E	18 mm	10.5 mm	0.001 kg
FS 12E	Serrated lock washer FS 12E	20.5 mm	12.5 mm	0.002 kg
FS 6E	Serrated lock washer FS 6E	11 mm	6.4 mm	0.000 kg
FS 8E	Serrated lock washer FS 8E	14 mm	8.2 mm	0.001 kg

DETAIL- UND ANWENDUNGSBILDER



