


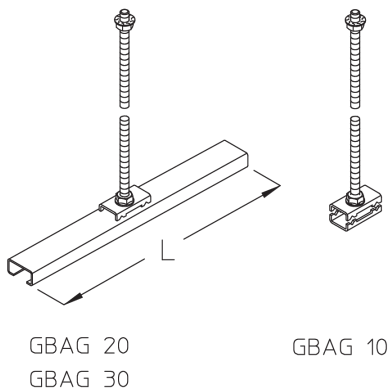

GBAG

Middle suspending bracket, external


The external central suspension GBAG is used for suspending mesh cable trays up to 300 mm wide from ceilings. It is designed for loads of up to 0.5 kN. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications. The GB threaded rod is 1000 mm long and is included in the set. FD/P: factor for calculating the dowel load FD with the actual bracket load P or the sum of the actual bracket loads.

Artikel	Typ	H	B	L	P _{max}	F _D /P	W
GBAG 10S	Central hanger GBAG 10S	1000 mm	20 mm	41 mm	0.50 kN	1.00	0.356 kg
GBAG 20S	Central hanger GBAG 20S	1000 mm	30 mm	180 mm	0.50 kN	1.00	0.514 kg
GBAG 30S	Central hanger GBAG 30S	1000 mm	30 mm	280 mm	0.50 kN	1.00	0.654 kg

Artikel	Typ	H	B	L	P _{max}	F _D /P	W
GBAG 10E	Central hanger GBAG 10E	1000 mm	20 mm	41 mm	0.50 kN	1.00	0.356 kg
GBAG 20E	Central hanger GBAG 20E	1000 mm	30 mm	180 mm	0.50 kN	1.00	0.515 kg
GBAG 30E	Central hanger GBAG 30E	1000 mm	30 mm	280 mm	0.50 kN	1.00	0.655 kg

DETAIL- UND ANWENDUNGSBILDER



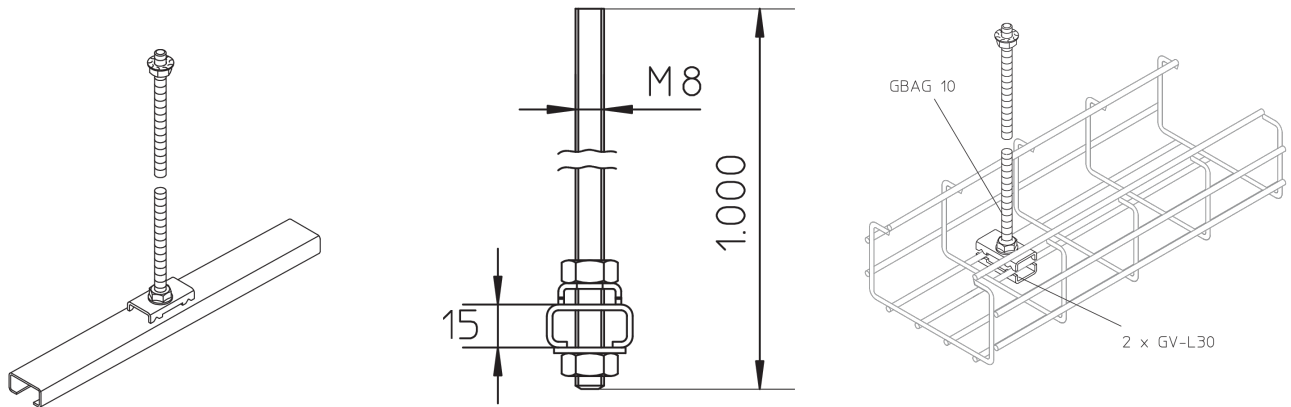

OPTIONALES ZUBEHÖR

SD, SAZ, VM

