


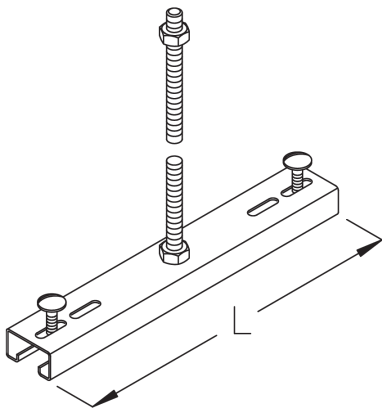

GBAR

Middle suspending bracket, external


The external central suspension GBAR is used for suspending cable trays up to 300 mm wide from ceilings. It is designed for loads of up to 0.7 kN. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications. The GB threaded rod is 1000 mm long and is included in the set. F_D/P : factor for calculating the dowel load F_D with the actual bracket load P or the sum of the actual bracket loads.

Artikel	Typ	H	B	L	P_{max}	F_D/P	W
GBAR 10S	Central hanger GBAR 10S	1000 mm	30 mm	60 mm	0.70 kN	1.00	0.612 kg
GBAR 20S	Central hanger GBAR 20S	1000 mm	30 mm	160 mm	0.70 kN	1.00	0.742 kg
GBAR 30S	Central hanger GBAR 30S	1000 mm	30 mm	260 mm	0.70 kN	1.00	0.872 kg

Artikel	Typ	H	B	L	P_{max}	F_D/P	W
GBAR 10E	Central hanger GBAR 10E	1000 mm	30 mm	60 mm	0.70 kN	1.00	0.616 kg
GBAR 20E	Central hanger GBAR 20E	1000 mm	30 mm	160 mm	0.70 kN	1.00	0.746 kg
GBAR 30E	Central hanger GBAR 30E	1000 mm	30 mm	260 mm	0.70 kN	1.00	0.876 kg

DETAIL- UND ANWENDUNGSBILDER



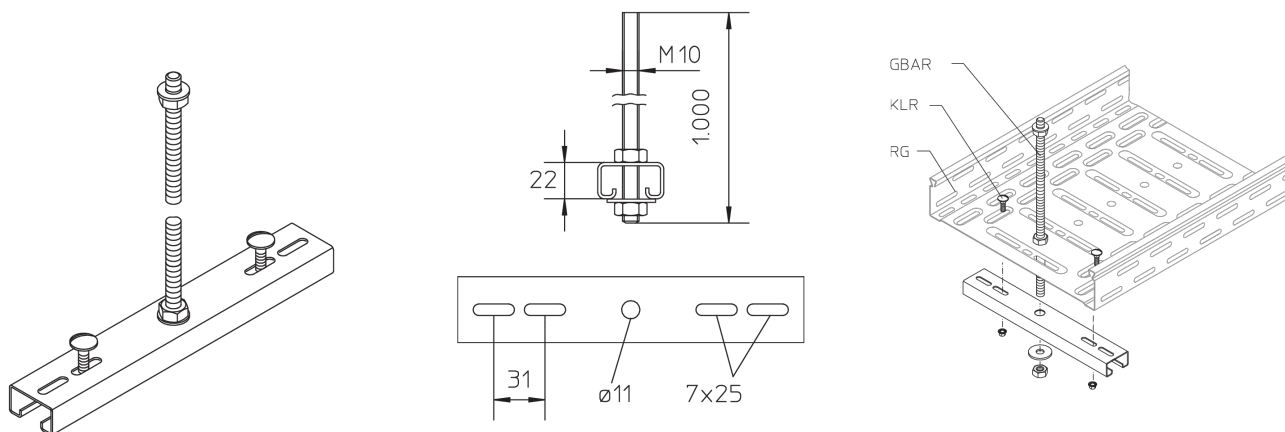

OPTIONALES ZUBEHÖR

SD, SAZ, VM

