


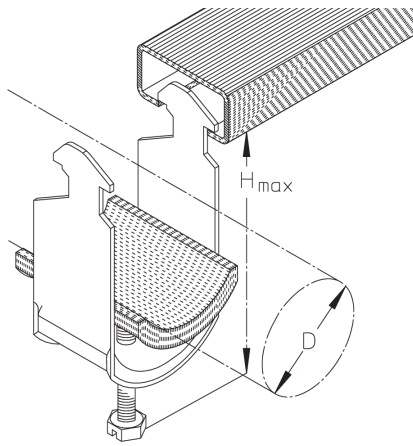

H-IW

Cable clamp with additional insulating tray for fastening to C profile rails

The H-IW cable clamp with a full-surface pressure trough and an additional insulating trough made of polystyrene can route cables with a maximum diameter of 70 mm. It is suitable for attachment to C profile rails with a slot width of 16 mm. On request, a GW counter trough can be fitted for improved cable support.


The article is also available with lock nuts. This prevents the clamp from unintentionally coming loose. Lock nuts must be specified separately when ordering.

The H-IW cable clamp is made of galvanised steel. Items with a diameter of 12 to 52 mm are also available in aluminium or stainless steel with material no. 1.4301 (V2A) and 1.4571/1.4404 (V4A).

Artikel	Typ	H _{max}	D	M	cables	W
12 H-IW	Cable clamp 12 H-IW	42.5 mm	8 - 12 mm	2 Nm	1	0.029 kg
16 H-IW	Cable clamp 16 H-IW	47.5 mm	12 - 16 mm	2 Nm	1	0.033 kg
32 H-IW	Cable clamp 32 H-IW	65 mm	28 - 32 mm	2 Nm	1	0.056 kg
24 H-IW	Cable clamp 24 H-IW	55.7 mm	20 - 24 mm	2 Nm	1	0.041 kg
28 H-IW	Cable clamp 28 H-IW	59.7 mm	24 - 28 mm	2 Nm	1	0.046 kg
36 H-IW	Cable clamp 36 H-IW	69 mm	32 - 36 mm	2 Nm	1	0.061 kg
40 H-IW	Cable clamp 40 H-IW	73 mm	36 - 40 mm	2 Nm	1	0.066 kg
44 H-IW	Cable clamp 44 H-IW	83 mm	40 - 44 mm	4 Nm	1	0.095 kg
52 H-IW	Cable clamp 52 H-IW	92.5 mm	48 - 52 mm	4 Nm	1	0.116 kg
48 H-IW	Cable clamp 48 H-IW	87 mm	44 - 48 mm	4 Nm	1	0.101 kg
56 H-IW	Cable clamp 56 H-IW	96.5 mm	52 - 56 mm	4 Nm	1	0.122 kg
60 H-IW	Cable clamp 60 H-IW	100.5 mm	56 - 60 mm	4 Nm	1	0.154 kg
20 H-IW	Cable clamp 20 H-IW	51.5 mm	16 - 20 mm	2 Nm	1	0.038 kg
70 H-IW	Cable clamp 70 H-IW	111.5 mm	64 - 70 mm	4 Nm	1	0.176 kg
64 H-IW	Cable clamp 64 H-IW	104.5 mm	60 - 64 mm	4 Nm	1	0.166 kg



DETAIL- UND ANWENDUNGSBILDER

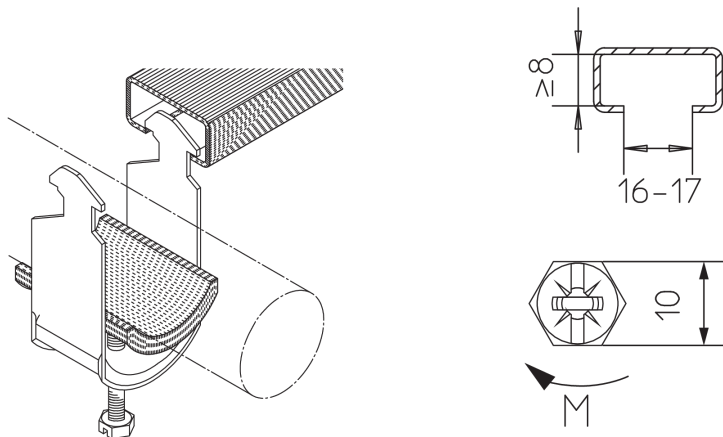

OPTIONALES ZUBEHÖR

GW 12-70, B 7, KHB 7

