


HB 50

Spacer bracket

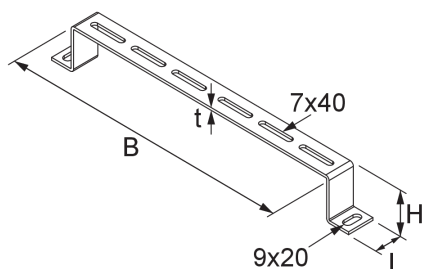

The spacer bracket can be used to mount perforated cable trays and mesh cable trays at a distance from the floor or wall. Fixing is carried out with GH 6x24 or KLU, or with KLF or KLR.

The fixing material must be ordered separately. Various materials and surfaces ensure that the corrosion requirements of a wide range of applications are met.

Artikel	Typ	H	B	L	t	W
HB 50-010S	spacer bar	50 mm	118 mm	30 mm	3 mm	0.160 kg
HB 50-020S	spacer bar	50 mm	218 mm	30 mm	3 mm	0.218 kg
HB 50-030S	spacer bar	50 mm	318 mm	30 mm	3 mm	0.289 kg
HB 50-040S	spacer bar	50 mm	418 mm	40 mm	3 mm	0.501 kg
HB 50-050S	spacer bar	50 mm	518 mm	40 mm	3 mm	0.598 kg
HB 50-060S	spacer bar	50 mm	618 mm	40 mm	3 mm	0.695 kg


Artikel	Typ	H	B	L	t	W
HB 50-010F	spacer bar	50 mm	118 mm	30 mm	3 mm	0.171 kg
HB 50-020F	spacer bar	50 mm	218 mm	30 mm	3 mm	0.233 kg
HB 50-030F	spacer bar	50 mm	318 mm	30 mm	3 mm	0.309 kg
HB 50-040F	spacer bar	50 mm	418 mm	40 mm	3 mm	0.536 kg
HB 50-050F	spacer bar	50 mm	518 mm	40 mm	3 mm	0.640 kg
HB 50-060F	spacer bar	50 mm	618 mm	40 mm	3 mm	0.744 kg

Artikel	Typ	H	B	L	t	W
HB 50-010E	spacer bar	50 mm	118 mm	30 mm	3 mm	0.163 kg
HB 50-020E	spacer bar	50 mm	218 mm	30 mm	3 mm	0.222 kg
HB 50-030E	spacer bar	50 mm	318 mm	30 mm	3 mm	0.295 kg



Artikel	Typ	H	B	L	t	W
HB 50-040E	spacer bar	50 mm	418 mm	40 mm	3 mm	0.511 kg
HB 50-050E	spacer bar	50 mm	518 mm	40 mm	3 mm	0.610 kg
HB 50-060E	spacer bar	50 mm	618 mm	40 mm	3 mm	0.709 kg

DETAIL- UND ANWENDUNGSBILDER

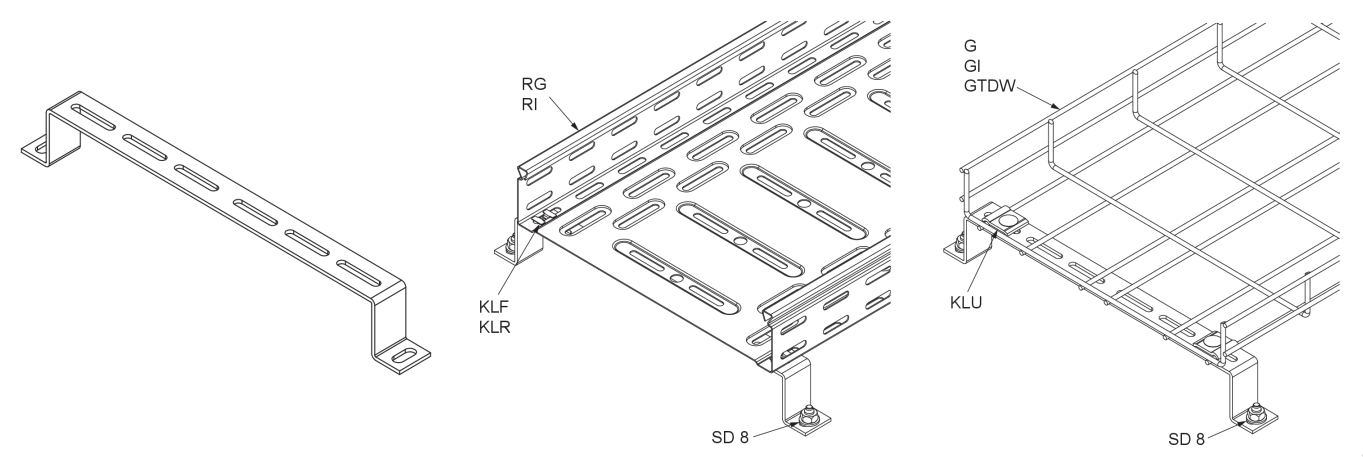

OPTIONALES ZUBEHÖR

SD, GH 6x24, KLR, KLF

