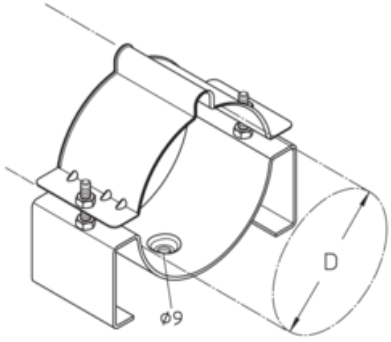

HF-EL 5-6

HF cable clamps for fastening to walls

The HF cable clamps HF-EL 5-6 can be used to route fibre-optic/high-frequency cables with a maximum diameter of 160 mm. They are suitable for mounting directly on the wall and are made of galvanised steel. Use HF-EE clamp inserts to accommodate various elliptical cables.

Steel, hot-dip galvanised

Article	D	cable type	G
HF-EL 5 HF cable clamp HF-EL 5	128 mm	E 26-30	0.850 kg
HF-EL 6 HF cable clamp HF-EL 6	160 mm	E 20	1.070 kg

D: Diameter (mm)
cable type: Cable type
G: Weight per storage unit

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 17.11.2026. Errors and technical changes reserved

DETAIL AND APPLICATION IMAGES

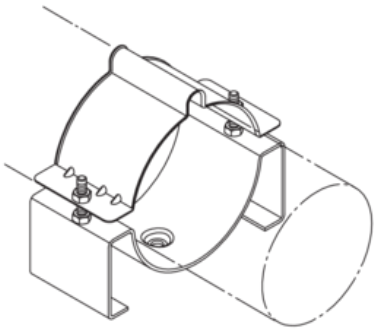

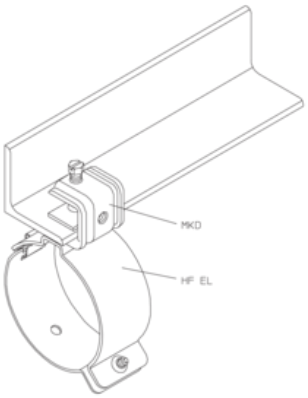

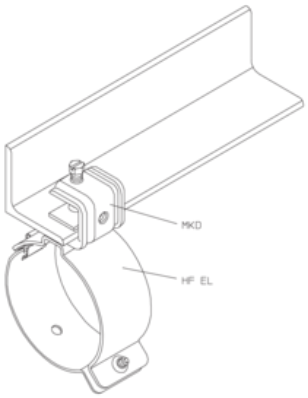

OPTIONAL ACCESSORIES

HF-EE

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 17.11.2026. Errors and technical changes reserved