


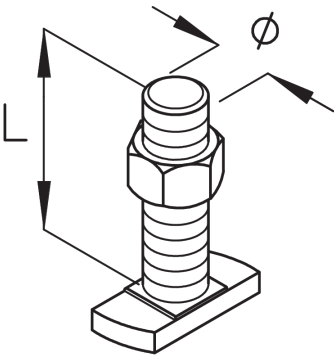

HS12
Tee-head bolt



HS12 tee-head bolts are used to fasten companion structures to profile rails or mounting channels. They have heads shaped like hammers. The bolts are available in lengths from 20 to 40 mm and are supplied with nuts. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

Artikel	Typ	L	Ø	W
HS12 10X20	Tee-head bolt HS12 10X20	20 mm	10 mm	0.030 kg
HS12 10X30	Tee-head bolt HS12 10X30	30 mm	10 mm	0.035 kg
HS12 10X40	Tee-head bolt HS12 10X40	40 mm	10 mm	0.040 kg
HS12 6X30	Tee-head bolt HS12 6X30	30 mm	6 mm	0.017 kg
HS12 6X40	Tee-head bolt HS12 6X40	40 mm	6 mm	0.019 kg
HS12 8X20	Tee-head bolt HS12 8X20	20 mm	8 mm	0.021 kg
HS12 8X30	Tee-head bolt HS12 8X30	30 mm	8 mm	0.024 kg
HS12 8X40	Tee-head bolt HS12 8X40	40 mm	8 mm	0.028 kg

Artikel	Typ	L	Ø	W
HS12 10X20E4	Tee-head bolt HS12 10X20E4	20 mm	10 mm	0.031 kg
HS12 10X30E4	Tee-head bolt HS12 10X30E4	30 mm	10 mm	0.035 kg
HS12 10X40E4	Tee-head bolt HS12 10X40E4	40 mm	10 mm	0.041 kg

DETAIL- UND ANWENDUNGSBILDER



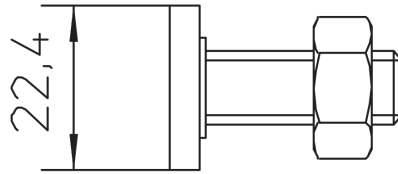

OPTIONALES ZUBEHÖR

B 3, B 6

