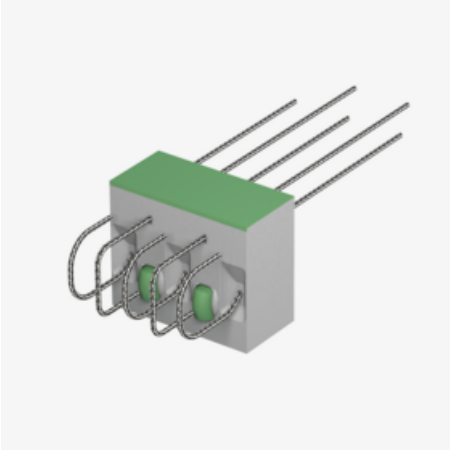

IP120 O

Thermally insulated connection for reinforced concrete brackets supporting masonry or precast elements with 120 mm insulating body

IP120 O is a thermally insulated connection with a 120 mm insulating body for connecting floor slabs with reinforced concrete brackets used as supports for masonry or precast elements. It is suitable for transmitting shear forces, the resulting moments and horizontal forces. These elements are used at specific points depending on the relevant structural requirements. The stainless steel rebar is resistant to corrosion. It complies with fire protection requirements: IP120 O is available for fire protection structures up to REI 120. Please specify the load-bearing capacity, element height and fire protection version when ordering.

AbZ General building approval: Z-15.7-331

Article	G
234800021169 IP120 O1	2.300 kg
234800021170 IP120 O2	2.400 kg

G: Weight per storage unit

PohlCon

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 27.11.2026. Errors and technical changes reserved