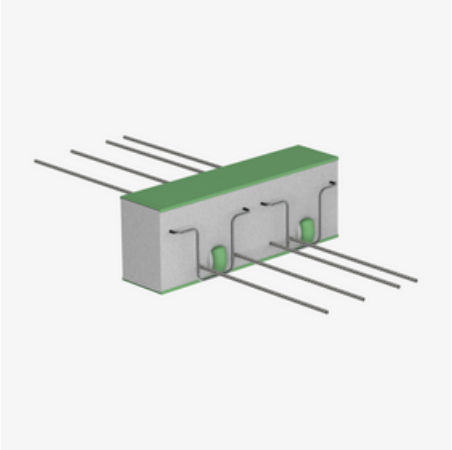


IP120 QS

Thermally insulated slab connection for punctual transmission of shear forces in supported reinforced concrete components with 120 mm insulating body

IP120 QS is a thermally insulated slab connection with a 120 mm insulating body for transmitting shear forces in supported reinforced concrete components and for punctual force transmission. The stainless steel rebar is resistant to corrosion. The thrust bearing is made of special concrete. It complies with fire protection requirements: IP120 QS is available for fire protection structures up to REI 120. Please specify the load-bearing capacity, element height and fire protection version when ordering.

Type testing ISOPRO® 120 thermal insulation element

Test report no. 4117/6 confirms the suitability of ISOPRO® thermal insulation elements in accordance with the applicable building regulations.

ETA European Technical Assessment: ETA-17/0466

abG General Building Approval: Z-15.7-354 (combined with ETA-17/0466)

TYP Type approval: 4117/6

Article	G
233900021091 IP120 QS20	4.800 kg
233900021092 IP120 QS30	5.600 kg
233900021093 IP120 QS40	3.900 kg
233900021094 IP120 QS50	4.800 kg
233900021095 IP120 QS60	6.100 kg
233900021096 IP120 QS70	5.300 kg
233900021097 IP120 QS80	8.500 kg
233900021098 IP120 QS90	8.500 kg
233900021762 IP120 QS100	2.900 kg

PohlCon

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 27.11.2026. Errors and technical changes reserved

Article	G
233900021763 IP120 QS110	2.900 kg
233900021764 IP120 QS120	2.900 kg

G: Weight per storage unit

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 27.11.2026. Errors and technical changes reserved