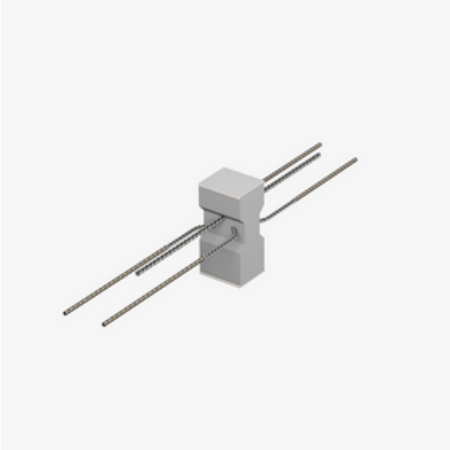

IP80 H

Thermally insulated slab connection for punctual transmission of horizontal forces

IP80 H is a thermally insulated slab connection with an 80 mm insulating body for the planned transmission of horizontal forces parallel and/or perpendicular to the insulation layer. It is used to supplement the linear connections at specific points e.g. in conjunction with type IP, IPT or IPQ. The stainless steel rebar is resistant to corrosion. It complies with fire protection requirements: IP80 H is available for fire protection structures up to REI 120. Please specify the load-bearing capacity, element height and fire protection version when ordering.

ETA European Technical Assessment: ETA-17/0466

abG General Building Approval: Z-15.7-354 (combined with ETA-17/0466)

Article	G
210900021860 IP80 HX1	0.590 kg
210900021862 IP80 HX1Y1	0.590 kg
210900021864 IP80 HX2	0.950 kg
210900021866 IP80 HX2Y2	0.950 kg

G: Weight per storage unit

PohlCon

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 26.11.2026. Errors and technical changes reserved