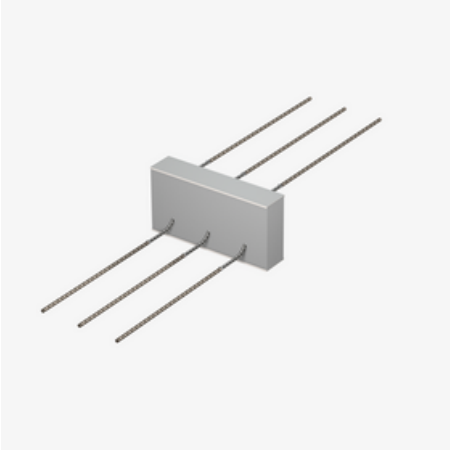

IPQZ

Thermally insulated slab connection for tension-free connection of recessed balconies and loggias without a pressure component

IPQZ is a thermally insulated slab connection with an 80 mm insulating body for the tension-free connection of recessed balconies and loggias. The stainless steel rebar is resistant to corrosion. For the purpose of tension-free support, this item does not have a pressure component. It complies with fire protection requirements: IPQZ is available for fire protection structures up to REI 120. Please specify the load-bearing capacity, element height and fire protection version when ordering.

Type testing ISOPRO® 120 thermal insulation element

Test report no. 4117-5076 confirms the suitability of ISOPRO® thermal insulation elements in accordance with the applicable building regulations.

ETA European Technical Assessment: ETA-17/0466

abG General Building Approval: Z-15.7-354 (combined with ETA-17/0466)

TYP Type approval: 4117-5076

Article	G
210800012505 IPQZ10	1.000 kg
210800012506 IPQZ20	1.500 kg
210800012508 IPQZ30	2.000 kg
210800012510 IPQZ40	1.800 kg
210800012512 IPQZ50	2.600 kg
210800012513 IPQZ60	2.800 kg
210800012516 IPQZ70	4.200 kg
210800012518 IPQZ80	2.800 kg
210800012520 IPQZ90	4.200 kg

PohlCon

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 26.11.2026. Errors and technical changes reserved

Article	G
210800015058 IPQZ5	0.800 kg
210800015060 IPQZ15	1.000 kg
210800015064 IPQZ55	3.500 kg
210800018552 IPQZ75	2.920 kg
210800025048 IPQZ100	5.250 kg

G: Weight per storage unit

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 26.11.2026. Errors and technical changes reserved