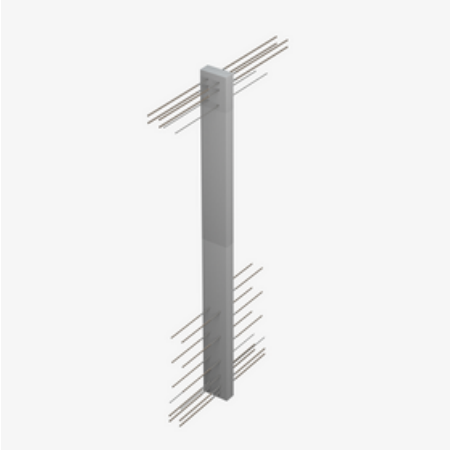

IPTW

Thermally insulated connection for cantilevered reinforced concrete walls

IPTW is a thermally insulated connection with an 80 mm insulating body for connecting cantilevered reinforced concrete walls with storey walls. It is suitable for transmitting negative moments, positive shear forces and horizontal forces. The stainless steel rebar is resistant to corrosion. It complies with fire protection requirements: IPTW is available for fire protection structures up to REI 120. Please specify the load-bearing capacity, element dimensions and fire protection version when ordering.

Article	G
211600018982 IPTW1 Wandbr 15 25	8.300 kg
211600018983 IPTW2 Wandbr 15 25	13.170 kg
211600018984 IPTW3 Wandbr 15 25	22.040 kg
211600018985 IPTW4 Wandbr 15 25	36.350 kg

G: Weight per storage unit

PohlCon

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 26.11.2026. Errors and technical changes reserved