




ISOPRO® IP 120 H

ISOPRO® IP 120 H is a thermally insulated slab connection with a 120 mm insulating body for the planned transmission of horizontal forces parallel and/or perpendicular to the insulation layer. It is used to supplement the linear connections at specific points e.g. in conjunction with type IP 120 M or IP 120 Q. The stainless steel rebar is resistant to corrosion. It complies with fire protection requirements: ISOPRO® IP 120 H is available for fire protection structures up to REI 90 (surrounding fire protection panels on request). Please specify the load-bearing capacity, element height and fire protection version when ordering.

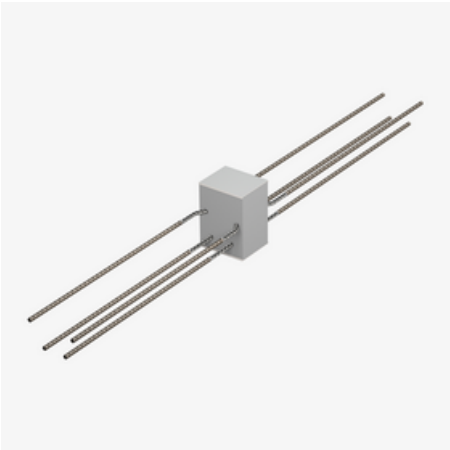

Article	Type	G
220300025418	IPBHM14 Q08 180	17.740 kg
220400025419	IPHBQ10 180	16.061 kg

G: Weight per storage unit



General building approval: Z-15.7-331

