


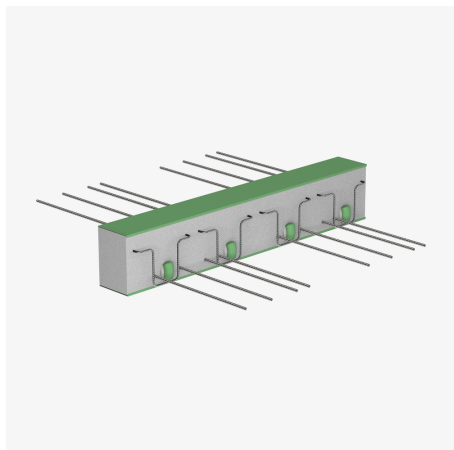

ISOPRO® IP 120 Q

ISOPRO® IP 120 Q is a thermally insulated slab connection with a 120 mm insulating body for transmitting shear forces in supported reinforced concrete components. The stainless steel rebar is resistant to corrosion. The thrust bearing is made of special concrete. It complies with fire protection requirements: ISOPRO® IP 120 Q is available for fire protection structures up to REI 90. Please specify the load-bearing capacity, element height and fire protection version when ordering.

AbZ

Artikel	Typ	W
233500021042	IP120 Q10	5.700 kg
233500021043	IP120 Q20	5.900 kg
233500021044	IP120 Q30	6.200 kg
233500021045	IP120 Q40	6.400 kg
233500021046	IP120 Q50	6.800 kg
233500021047	IP120 Q60	7.500 kg
233500021048	IP120 Q70	7.900 kg
233500021049	IP120 Q80	8.900 kg
233500021050	IP120 Q90	9.700 kg
233500021051	IP120 Q100	11.600 kg
233500021052	IP120 Q110	12.800 kg
233500021053	IP120 Q120	14.200 kg

AbZ

Allgemeine bauaufsichtliche Zulassung: Z-15.7-331

