


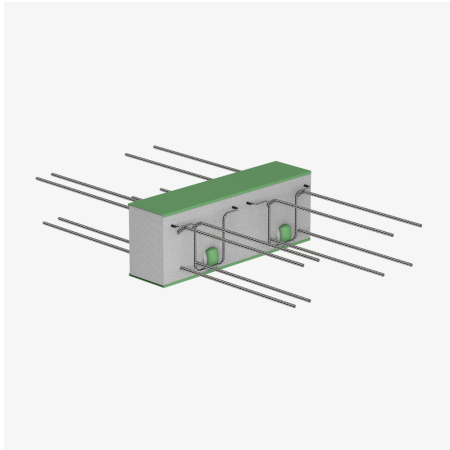

ISOPRO® IP 120 QQS

ISOPRO® IP 120 QQS is a thermally insulated slab connection with a 120 mm insulating body for transmitting positive and negative shear forces in supported reinforced concrete components with uplifting loads and for punctual force transmission. The stainless steel rebar is resistant to corrosion. It complies with fire protection requirements: ISOPRO® IP 120 QQS is available for fire protection structures up to REI 90. Please specify the load-bearing capacity, element height and fire protection version when ordering.

AbZ

Artikel	Typ	W
234100021108	IP120 QQS10	4.380 kg
234100021109	IP120 QQS20	6.390 kg
234100021110	IP120 QQS30	8.560 kg
234100021111	IP120 QQS40	6.440 kg
234100021112	IP120 QQS50	10.200 kg
234100021113	IP120 QQS60	10.540 kg
234100021114	IP120 QQS70	45.400 kg
234100021115	IP120 QQS80	14.060 kg
234100021116	IP120 QQS90	15.000 kg
234100021756		13.500 kg
234100021757		15.900 kg
234100021758		16.200 kg

AbZ

Allgemeine bauaufsichtliche Zulassung: Z-15.7-331

