


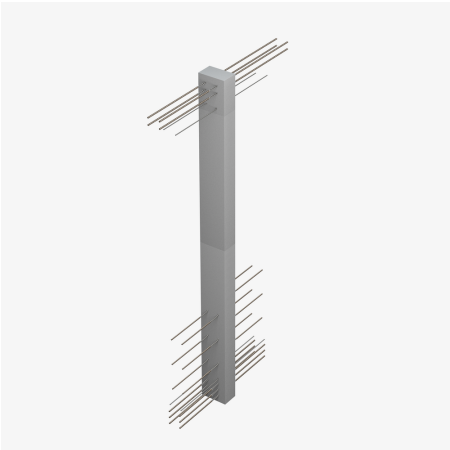

ISOPRO® IP 120 W

ISOPRO® IP 120 W is a thermally insulated connection with a 120 mm insulating body for connecting cantilevered reinforced concrete walls with storey walls. It is suitable for transmitting moments, shear forces and horizontal forces. The stainless steel rebar is resistant to corrosion. It complies with fire protection requirements: ISOPRO® IP 120 W is available for fire protection structures up to REI 90. Please specify the load-bearing capacity, element dimensions and fire protection version when ordering.

AbZ

Artikel	Typ	W
235000021158	IP120 W1	9.100 kg
235000021159	IP120 W2	14.400 kg
235000021160	IP120 W3	26.800 kg
235000021161	IP120 W4	41.100 kg

AbZ

Allgemeine bauaufsichtliche Zulassung: Z-15.7-331

