


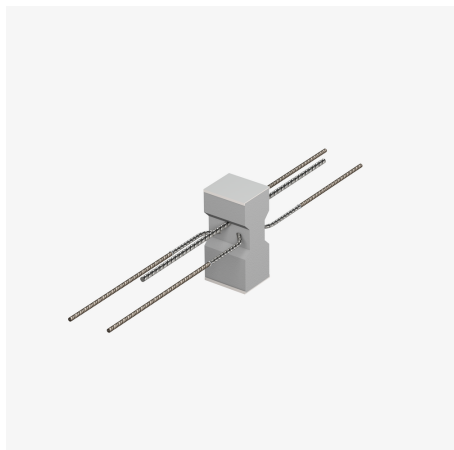

ISOPRO® IP 80-H

ISOPRO® IP 80-H is a thermally insulated slab connection with an 80 mm insulating body for the planned transmission of horizontal forces parallel and/or perpendicular to the insulation layer. It is used to supplement the linear connections at specific points e.g. in conjunction with type IP, IPT or IPQ. The stainless steel rebar is resistant to corrosion. It complies with fire protection requirements: ISOPRO® IP 80-H is available for fire protection structures up to REI 90. Please specify the load-bearing capacity, element height and fire protection version when ordering.

ETA

Artikel	Typ	W
210900021860	IPH1	0.590 kg
210900021862	IPH1	0.590 kg
210900021864	IPH1	0.950 kg
210900021866	IPH1	0.950 kg

ETA

Europäische Technische Bewertung: ETA-17/0466

