




ISOPRO® IP Corner

ISOPRO® IP Corner is a thermally insulated cantilever slab connection with an 80 mm insulating body and integrated suspension reinforcement on the balcony side for connecting cantilevered reinforced concrete components at external corners. It is suitable for transmitting negative moments and positive shear forces. The stainless steel rebar is resistant to corrosion. The thrust bearing is made of special concrete. The partial elements left IP EL and right IP ER are also available separately. It complies with fire protection requirements: ISOPRO® IP Corner is available for fire protection structures up to REI 90. Please specify the load-bearing capacity, concrete cover, element height and fire protection version when ordering.

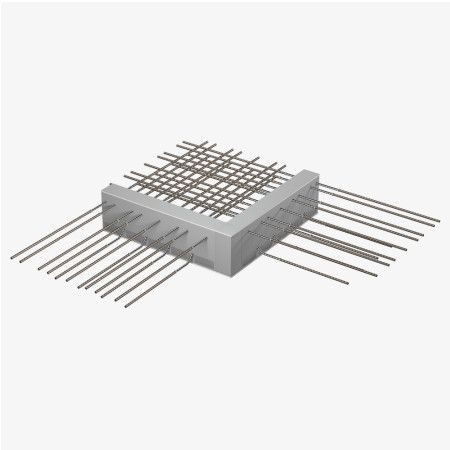

Artikel	Typ	W
210300012399	IP-Eck 20	23.790 kg
210300012401	IP-Eck 30	38.300 kg
210300018948	IP EL 20	11.890 kg
210300018949	IP EL 30	19.100 kg
210300018951	IP ER 20	11.890 kg
210300018952	IP ER 30	19.100 kg



Europäische Technische Bewertung: ETA-17/0466

