




ISOPRO® IPO

ISOPRO® IPO is a thermally insulated connection with an 80 mm insulating body for connecting ceiling slabs with reinforced concrete brackets used as supports for masonry or precast elements. It is suitable for transmitting positive shear forces, the resulting negative moments and horizontal forces. These elements are used at specific points depending on the relevant structural requirements. The stainless steel rebar is resistant to corrosion. It complies with fire protection requirements: ISOPRO® IPO is available for fire protection structures up to REI 90. Please specify the load-bearing capacity, element height and fire protection version when ordering.

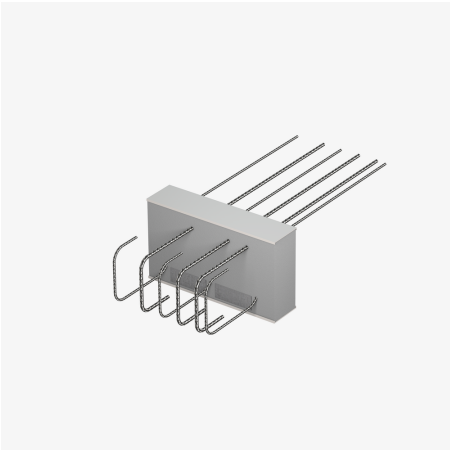

Artikel	Typ	W
211400021507	IPO 18 R	4.970 kg



Europäische Technische Bewertung: ETA-17/0466

