


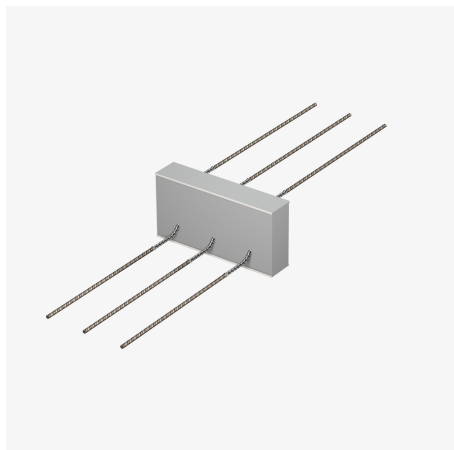

ISOPRO® IPQZ

ISOPRO® IPQZ is a thermally insulated slab connection with an 80 mm insulating body for the tension-free connection of recessed balconies and loggias. The stainless steel rebar is resistant to corrosion. For the purpose of tension-free support, this item does not have a pressure component. It complies with fire protection requirements: ISOPRO® IPQZ is available for fire protection structures up to REI 90. Please specify the load-bearing capacity, element height and fire protection version when ordering.

ETA

Artikel	Typ	W
210800012505	IPQZ10	1.000 kg
210800012506	IPQZ20	1.500 kg
210800012508	IPQZ30	2.000 kg
210800012510	IPQZ40	1.800 kg
210800012512	IPQZ50	2.600 kg
210800012513	IPQZ60	2.800 kg
210800012516	IPQZ70	4.200 kg
210800012518	IPQZ80	2.800 kg
210800012520	IPQZ90	4.200 kg
210800015058	IPQZ5	0.800 kg
210800015060	IPQZ15	1.000 kg
210800015064	IPQZ55	3.500 kg
210800018552	IPQZ75	2.920 kg
210800025048	IPQZ100	5.250 kg

ETA

Europäische Technische Bewertung: ETA-17/0466

