




ISOPRO® IPTW

ISOPRO® IPTW is a thermally insulated connection with an 80 mm insulating body for connecting cantilevered reinforced concrete walls with storey walls. It is suitable for transmitting negative moments, positive shear forces and horizontal forces. The stainless steel rebar is resistant to corrosion. It complies with fire protection requirements: ISOPRO® IPTW is available for fire protection structures up to REI 90. Please specify the load-bearing capacity, element dimensions and fire protection version when ordering.

Artikel	Typ	W
211600018982	IPTW1 Wandbr 15 25	8.300 kg
211600018983	IPTW2 Wandbr 15 25	13.170 kg
211600018984	IPTW3 Wandbr 15 25	22.040 kg
211600018985	IPTW4 Wandbr 15 25	36.350 kg

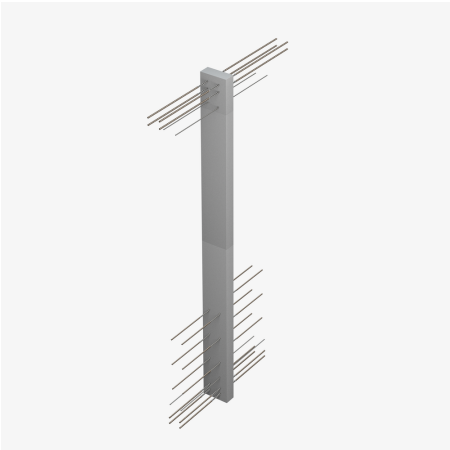