




JMK+ NA

The stainless steel Lean Duplex grout-in bracket JMK+ NA is available with load levels of 3.5 and 7.0. The rated resistances are accordingly FRd = 4.7 kN or FRd = 9.5 kN. The condition and load-bearing capacity of the substrate must be checked in advance. The compressive strength of the existing masonry must be at least 2.1 N/mm2 and the wall thickness at least 240 mm. If the compressive strength is lower or walls are thinner, a special solution must be developed. The JMK+ NA is available in cantilever lengths of 110 to 330 mm.

Artikel	Typ	B	L	W	W
JMK+250 NA/7.0	JORDAHL grout-in Bracket JMK+250 NA/7,0	60 mm	250 mm	90°	0.000 kg
JMK+250 NA/3.5	JORDAHL grout-in Bracket JMK+250 NA/3,5		250 mm	90°	0.000 kg

DETAIL- UND ANWENDUNGSBILDER

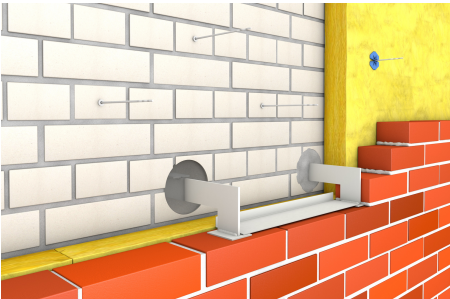

OPTIONALES ZUBEHÖR

JW

