

JVAeco+ F

The brickwork support bracket JVAeco+ F has general building authority approval and is available in the standard cantilever lengths of 130 or 150 to 390 mm and in several load levels. The JVAeco+ F can be adjusted vertically by ± 30 mm and perfectly aligned using the teeth in the bracket head and a slanted slit plate. The anchor channel can be horizontally adjusted. This allows structural tolerances to be perfectly compensated. The JVAeco+ F is made of stainless steel Lean Duplex in corrosion resistance class III. This ensures maintenance-free use.




Article	Type	H	L	N	G
JVAECO+290 F/7.0	JORDAHL Brickwork Support Bracket	365 mm	290 mm	+/- 30 mm	0.001 kg

H: height
L: length
N: levelling range
G: Weight per storage unit

DETAIL AND APPLICATION IMAGES



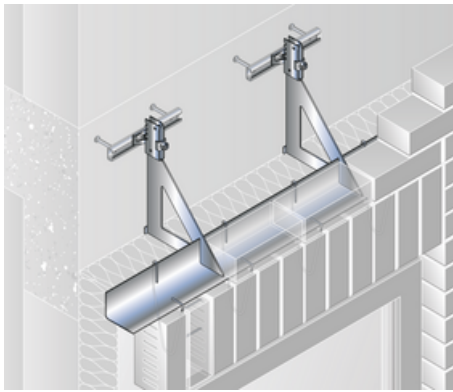

OPTIONAL ACCESSORIES

JRH



General building approval: Z-21.8-1868

