


KATB


T-joint connector plate

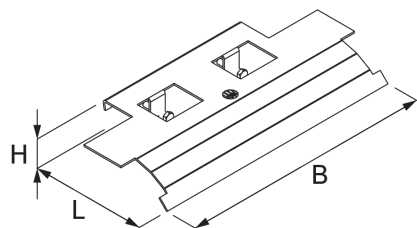


The T-joint connector plate is used for cable protection on non-cut T-connections of RG, LGG and WPL/WPR to enable cable-friendly installation. It is used to guide cables over the rail of the cable support system without sharp edges. The sheet metal is placed on the rail and screwed in place with hexagon head screw(s) SES.

Artikel	Typ	H	B	L	t	W
KATB-200S	Connection plate VB-BS 20S	31 mm	144 mm	216 mm	2 mm	0.394 kg
KATB-300S	Connection plate VB-BS 20S	31 mm	144 mm	316 mm	2 mm	0.627 kg
KATB-400S	Connection plate VB-BS 20S	31 mm	144 mm	416 mm	2 mm	0.881 kg
KATB-500S	Connection plate VB-BS 20S	31 mm	144 mm	516 mm	2 mm	1.135 kg
KATB-600S	Connection plate VB-BS 20S	31 mm	144 mm	616 mm	2 mm	1.389 kg

DETAIL- UND ANWENDUNGSBILDER

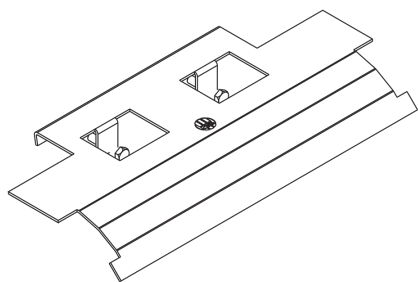

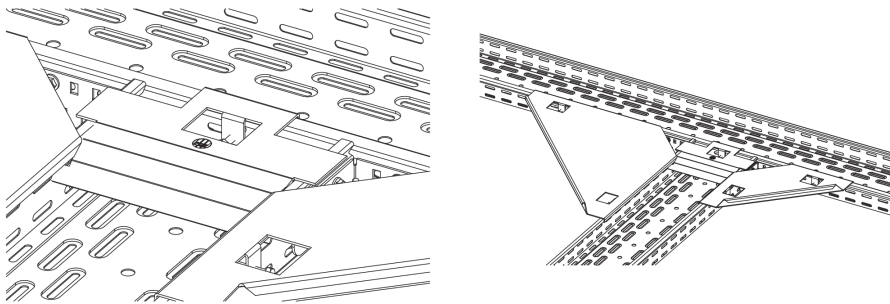

OPTIONALES ZUBEHÖR

RGV 35, RGV 60, RGV 85, RGV 110, KATBS

