


KATBS

T-joint connector plate, sideways

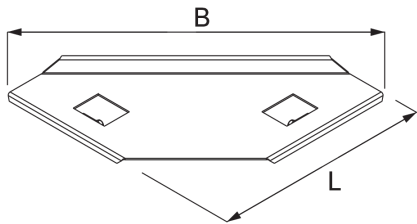


The side T-joint connector plate KATBS is used for cable protection on non-cut T-connections of RG, LGG and WPL/WPR to enable cable-friendly installation. It is used to guide cables over the rail of the cable support system without sharp edges. The sheet metal is placed on the rail and screwed in place with hexagon head screw(s) SES.

Artikel	Typ	H	B	L	t	W
KATBS-300S	Connection plate VB-BS 20S	34 mm	300 mm	436 mm	2 mm	1.007 kg
KATBS-500S	Connection plate VB-BS 20S	34 mm	500 mm	719 mm	2 mm	2.633 kg

DETAIL- UND ANWENDUNGSBILDER



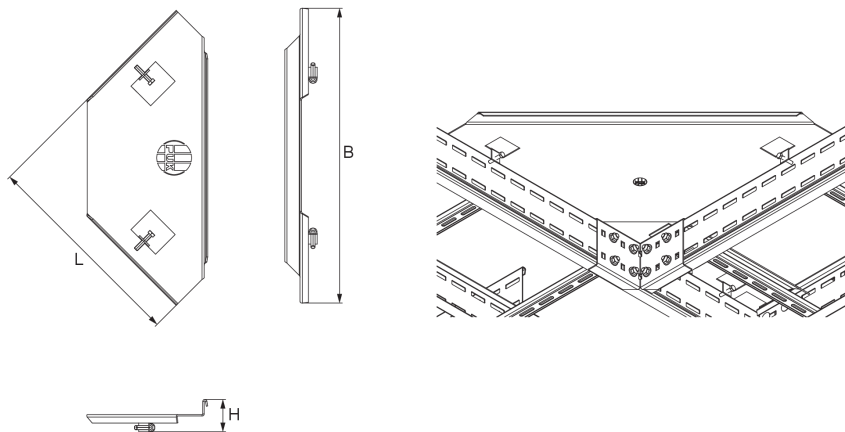

OPTIONALES ZUBEHÖR

RGV 35, RGV 60, RGV 85, RGV 110, KATB

