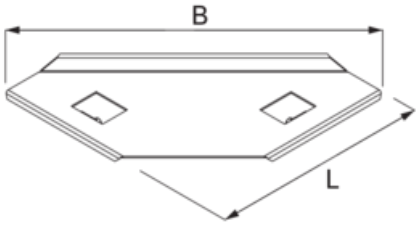

KATBS

T-joint connector plate, sideways

The side T-joint connector plate KATBS is used for cable protection on non-cut T-connections of RG, LGG and WPL/WPR to enable cable-friendly installation. It is used to guide cables over the rail of the cable support system without sharp edges. The sheet metal is placed on the rail and screwed in place with hexagon head screw(s) SES.

Steel, pre-galvanised/Sendzimir process

Article	H	B	L	t	G
KATBS-300S Connection plate VB-BS 20S	34 mm	436 mm	300 mm	2.00 mm	1.007 kg
KATBS-500S Connection plate VB-BS 20S	34 mm	719 mm	500 mm	2.00 mm	2.633 kg

H: height
B: width
L: length
t: material thickness
G: Weight per storage unit

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 17.11.2026. Errors and technical changes reserved

DETAIL AND APPLICATION IMAGES

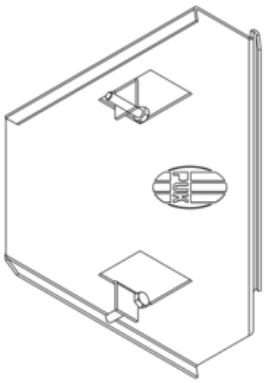

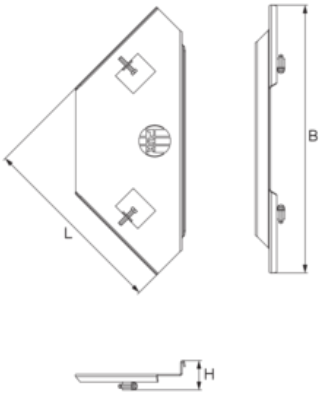

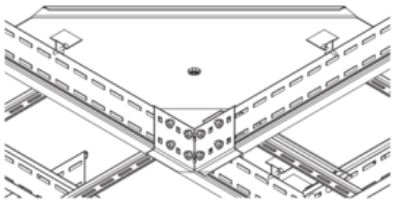

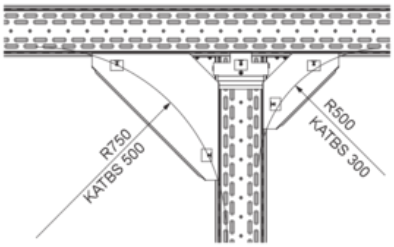

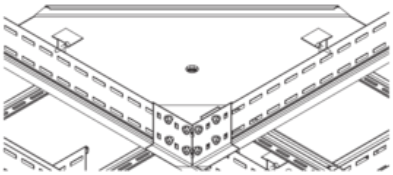

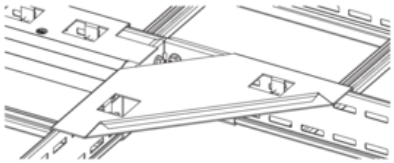

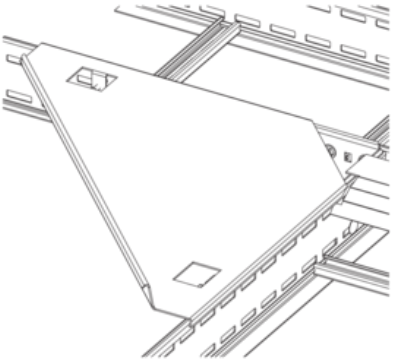

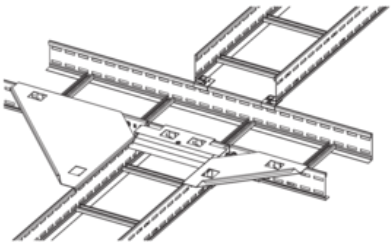

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 17.11.2026. Errors and technical changes reserved

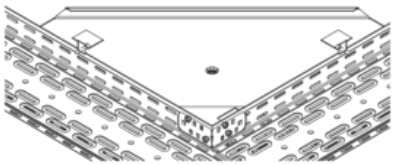
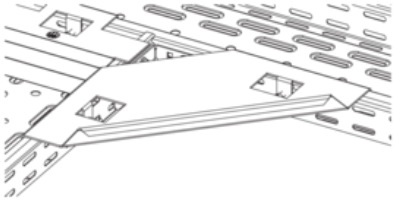
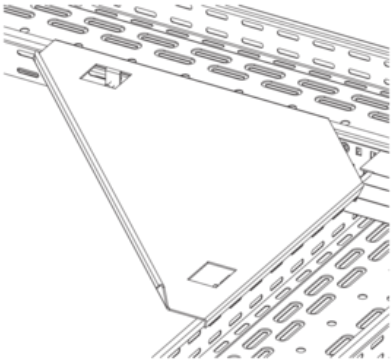
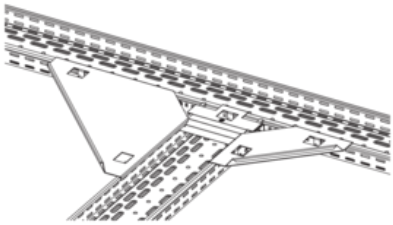
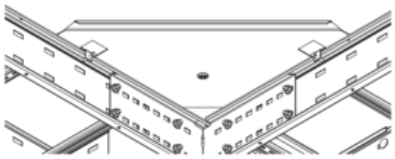
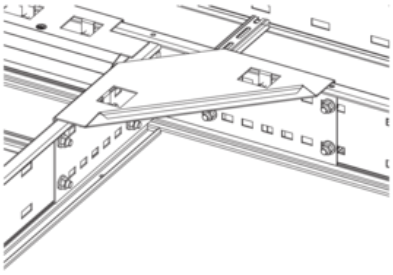
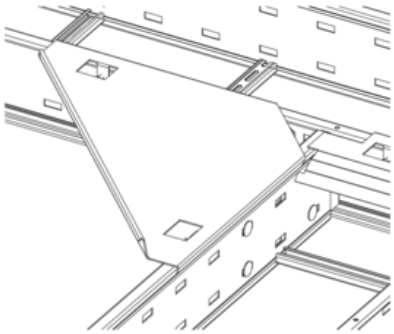
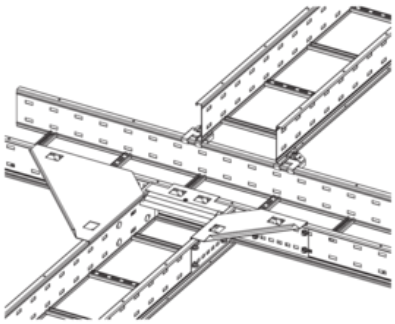

OPTIONAL ACCESSORIES

LGVH 60, LGVH 100, KATB

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 17.11.2026. Errors and technical changes reserved