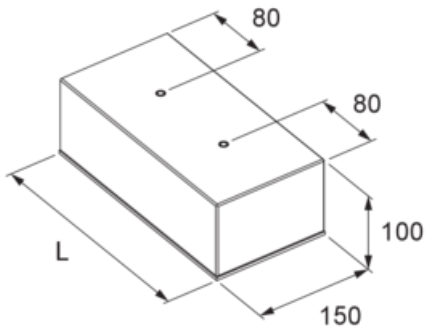

KFSB

Cable block, blank with protection mat

Cable block KFSB; roof tile with two U 6 plastic expansion dowels and protection mat. The dowels are compatible with chipboard/wood screws from 4.0 to 5.0 mm wide and a maximum length of 40 mm. Various profile rails with different surfaces/materials are available as optional accessories. The installation is suitable for mounting on flat roof surfaces or on the ground, for example. The protection mat serves as a firm support surface and prevents damage to the existing roof covering. Roof-mounted installation should be agreed with the building owner or specialist planner with regard to possible additional loads depending on the installation location.

fiber reinforced concrete

Article	H	B	L	G
KFSB 030 Cable moulding block 300 mm, no C-rail	100 mm	150 mm	300 mm	9.500 kg
KFSB 050 Cable moulding block 500 mm, no C-rail	100 mm	150 mm	500 mm	14.000 kg

H: height
B: width
L: length
G: Weight per storage unit

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 13.11.2026. Errors and technical changes reserved

DETAIL AND APPLICATION IMAGES

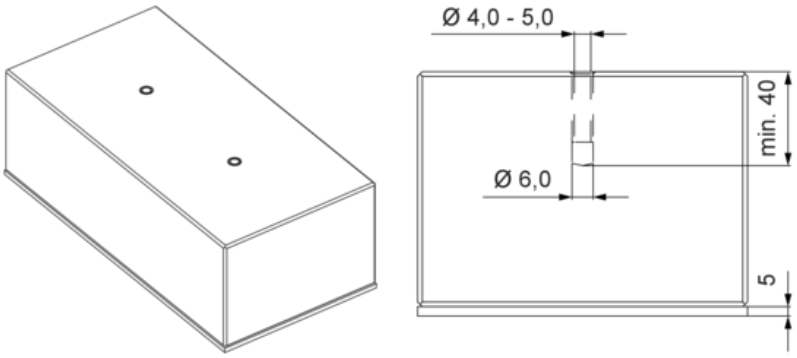

OPTIONAL ACCESSORIES

C-Profile Rails

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 13.11.2026. Errors and technical changes reserved