


KHA 2


50x31 mm profile rail, perforated


The profile rail KHA 2 consists of a C+ profile 50 x 31 mm with continuous perforation and a slot width of 22 mm (material thickness = 3.25 mm). It is made of hot-dip galvanised steel and is available in lengths of 500 or 6000 mm.

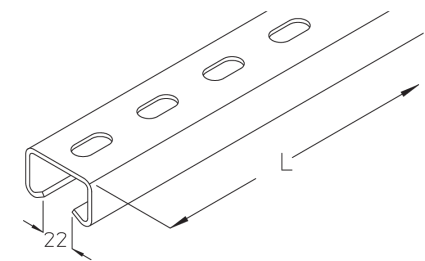

Artikel	Typ	H _p	B _p	L	t	W
KHA 2-05F	Bracket support KHA 2-05F	31 mm	50 mm	500 mm	3.25 mm	1.500 kg
KHA 2-10F	Bracket support KHA 2-10F	31 mm	50 mm	1000 mm	3.25 mm	3.000 kg
KHA 2-15F	Bracket support KHA 2-15F	31 mm	50 mm	1500 mm	3.25 mm	4.500 kg
KHA 2-20F	Bracket support KHA 2-20F	31 mm	50 mm	2000 mm	3.25 mm	6.000 kg
KHA 2-30F	Bracket support KHA 2-30F	31 mm	50 mm	3000 mm	3.25 mm	9.000 kg
KHA 2-60F	Bracket support KHA 2-60F	31 mm	50 mm	6000 mm	3.25 mm	17.900 kg

DETAIL- UND ANWENDUNGSBILDER

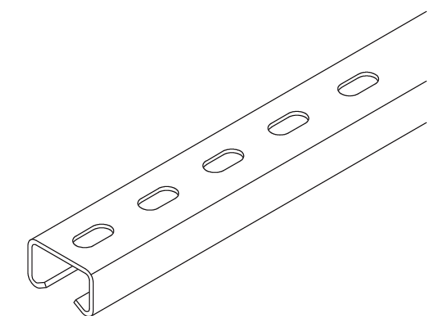



$$W_y = 2.31 \text{ cm}^3$$

$$W_z = 5.40 \text{ cm}^3$$

$$I_y = 3.77 \text{ cm}^4$$

$$I_z = 13.49 \text{ cm}^4$$

OPTIONALES ZUBEHÖR

HS22, SKS H

