


KHA 8

Profile rail 40x22 mm, perforated, for maintenance of function

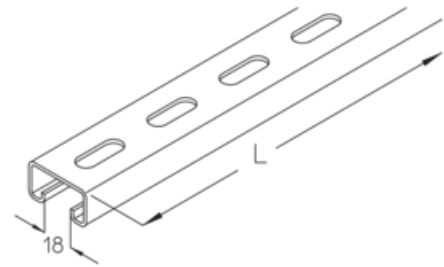

Fire protection



Steel, hot-dip galvanised

Article	H _p	B _p	L	t	G
KHA 8-01F Profile rail perforated 40/22x2,0	22 mm	40 mm	100 mm	2 mm	0.154 kg
KHA 8-02F Profile rail perforated 40/22x2,0	22 mm	40 mm	200 mm	2 mm	0.310 kg
KHA 8-03F Profile rail perforated 40/22x2,0	22 mm	40 mm	300 mm	2 mm	0.460 kg
KHA 8-04F Profile rail perforated 40/22x2,0	22 mm	40 mm	400 mm	2 mm	0.620 kg
KHA 8-05F Profile rail perforated 40/22x2,0	22 mm	40 mm	500 mm	2 mm	0.770 kg
KHA 8-06F Profile rail perforated 40/22x2,0	22 mm	40 mm	600 mm	2 mm	0.930 kg
KHA 8-07F Profile rail perforated 40/22x2,0	22 mm	40 mm	700 mm	2 mm	1.080 kg

H_p: profile height
B_p: profile width
L: length
t: Material strength profile
G: Weight per storage unit



DETAIL AND APPLICATION IMAGES

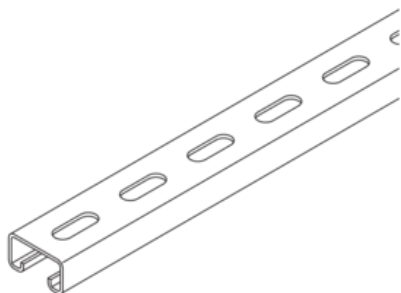

$$\begin{aligned}W_y &= 1.05 \text{ cm}^3 \\W_z &= 2.24 \text{ cm}^3 \\I_y &= 1.18 \text{ cm}^4 \\I_z &= 4.48 \text{ cm}^4\end{aligned}$$

