


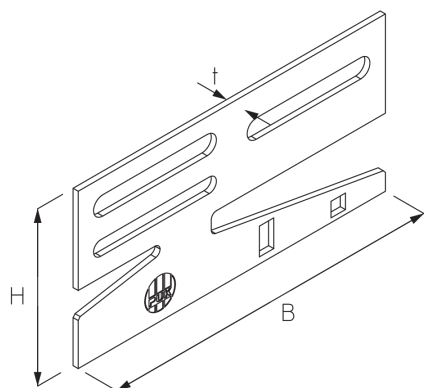

KLTL

Beam clamp for cable ladders

The KLTL beam clamp is used to clamp cable ladders to horizontally crossing steel beams. Offset placement of the clamp prevents movement in the longitudinal direction. Two notch positions on the clamping leg allow the leg to be adapted to shorter beam flanges. For beam flange thickness 5 - 22 mm.

Artikel	Typ	H	B	t	W
KLTL S	Cable ladder coupler, fire prevention	75 mm	150 mm	2.50 mm	0.173 kg

Artikel	Typ	H	B	t	W
KLTL F	Cable ladder coupler, fire prevention	75 mm	150 mm	2.50 mm	0.184 kg

Artikel	Typ	H	B	t	W
KLTL E	Cable ladder coupler, fire prevention	75 mm	150 mm	2.50 mm	0.174 kg

DETAIL- UND ANWENDUNGSBILDER



