


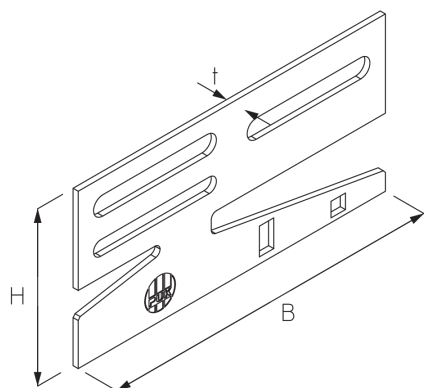

KLTR

Beam clamp for cable trays

The KLTR beam clamp is used to clamp cable trays to horizontally crossing steel beams. Offset placement of the clamp prevents movement in the longitudinal direction. Two notch points on the clamping leg allow the leg to be adapted to shorter beam flanges. For beam flange thickness 5 - 22 mm. Compatible from R(G) 60.

Artikel	Typ	H	B	t	W
KLTR S	Cable ladder coupler, fire prevention	75 mm	150 mm	2.50 mm	0.162 kg

Artikel	Typ	H	B	t	W
KLTR F	Cable ladder coupler, fire prevention	75 mm	150 mm	2.50 mm	0.174 kg

Artikel	Typ	H	B	t	W
KLTR E	Cable ladder coupler, fire prevention	75 mm	150 mm	2.50 mm	0.164 kg

DETAIL- UND ANWENDUNGSBILDER



