




KUNEX® FA

Joint sealing strip, PVC-P

KUNEX® PVC-P joint sealing strips are used to seal the surfaces of expansion joints. They are available according to DIN or with abP (German building code test certificate) in accordance with the factory standard and have 2 - 6 stop anchors depending on the version. The DIN joint tapes are bitumen-compatible.

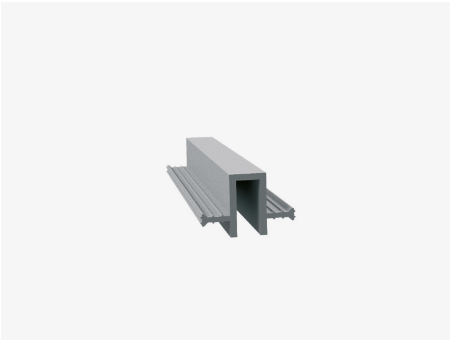

Artikel	Typ	H _p	B	No. of stop anchors	W
121100002792	Kunex FA130 20 DIN BV GRA	20 mm	130 mm	6	3.000 kg
121100002796	Kunex FA50 20 DIN BV grau	20 mm	50 mm	2	1.295 kg
121100002799	Kunex FA50 30 DIN BV grau	30 mm	50 mm	2	1.240 kg
121100002808	Kunex FA90 20 DIN BV grau	20 mm	90 mm	4	2.400 kg
121100002812	Kunex FA95 30 DIN BV grau	30 mm	95 mm	4	2.400 kg

Artikel	Typ	H _p	B	No. of stop anchors	W
121100002794	Kunex FA130 20 grau	20 mm	130 mm	6	3.040 kg
121100002798	Kunex FA50 20 grau	20 mm	50 mm	2	1.295 kg
121100002801	Kunex FA50 30 grau	30 mm	50 mm	2	1.220 kg
121100002810	Kunex FA90 20 grau	20 mm	90 mm	4	2.200 kg
121100002814	Kunex FA95 30 grau	30 mm	95 mm	4	2.400 kg



General building authority test certificate: P-5143/478/13 MPA BS

