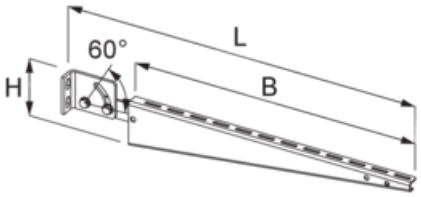

KWD

Swivel bracket

The KWD swivel bracket is designed for use on inclined walls up to 60°.
It can bear loads of up to 1.9 kN and is suitable for cable trays up to 600 mm wide.

Steel, hot-dip galvanised

Article	H	B	L	P_{max}	G
KWD 020F console variable	80 mm	220 mm	350 mm	1.91 kN	0.973 kg
KWD 030F console variable	80 mm	320 mm	450 mm	1.70 kN	1.075 kg
KWD 040F console variable	110 mm	420 mm	550 mm	1.48 kN	1.396 kg
KWD 050F console variable	130 mm	520 mm	650 mm	1.26 kN	1.824 kg
KWD 060F console variable	130 mm	620 mm	750 mm	1.05 kN	2.049 kg

H: height
B: usable width
L: length
P_{max}: maximum load
G: Weight per storage unit

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 13.11.2026. Errors and technical changes reserved

DETAIL AND APPLICATION IMAGES

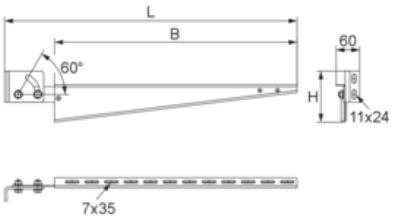

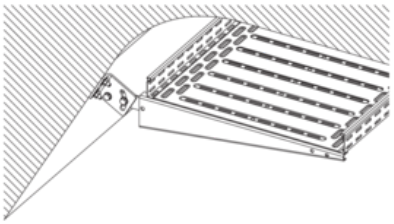

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 13.11.2026. Errors and technical changes reserved