


LD-SW

Cable ladder storm protection bracket

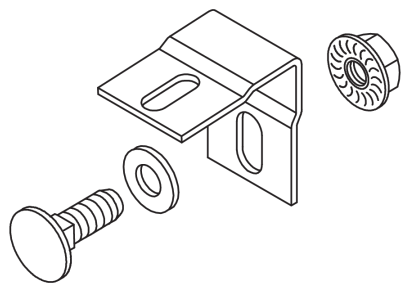

The storm protection bracket LD-SW is used to additionally secure the cable ladder cover when used outdoors. It is placed on top of the cover and bolted in place. The necessary fastening set is included. At least 6 safety elements must be used per 3 metres of cover according to the installation instructions. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

Artikel	Typ	H	B	L	t	W
LD-SW F	storm protection angle	46 mm	30 mm	30 mm	2.00 mm	0.057 kg

Artikel	Typ	H	B	L	t	W
LD-SW E	Storm protection angle LD-SW E	46 mm	30 mm	30 mm	2.00 mm	0.055 kg

Artikel	Typ	H	B	L	t	W
LD-SW E4	Storm protection angle LD-SW E	46 mm	30 mm	30 mm	2.00 mm	0.058 kg

DETAIL- UND ANWENDUNGSBILDER



