


LGAB 100

Cable ladder external bend, height = 100 mm

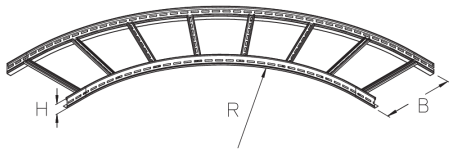


The cable ladder external bend LGAB 100 allows the direction of cable routing to be changed horizontally by 90°. They are suitable for cable ladders with rails 100 mm high and are 200 to 600 mm wide. The bend is mounted on the cable ladders using LGV side connectors (please order separately). The inner radius of the LGAB cable ladder external bend varies between 700 and 1100 mm depending on the width and is greater than that of the LGIB cable ladder internal bend. The cable ladder can thus be guided more widely around curves depending on the circumstances. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

Artikel	Typ	H	H _H	B	R	direction	W	W
LGAB 100-30F	Cable ladder outside bend 90°,	100 mm	100 mm	300 mm	800 mm	horizontal	90°	7.190 kg
LGAB 100-40F	Cable ladder outside bend 90°,	100 mm	100 mm	400 mm	900 mm	horizontal	90°	8.720 kg
LGAB 100-50F	Cable ladder outside bend 90°,	100 mm	100 mm	500 mm	1000 mm	horizontal	90°	10.390 kg
LGAB 100-60F	Cable ladder outside bend 90°,	100 mm	100 mm	600 mm	1100 mm	horizontal	90°	12.200 kg
LGAB 100-20F	Cable ladder outside bend 90°,	100 mm	100 mm	200 mm	700 mm	horizontal	90°	5.790 kg

Artikel	Typ	H	H _H	B	R	direction	W	W
LGAB 100-30E	Cable ladder outside bend 90°,	100 mm	100 mm	300 mm	800 mm	horizontal	90°	7.230 kg
LGAB 100-40E	Cable ladder outside bend 90°,	100 mm	100 mm	400 mm	900 mm	horizontal	90°	8.770 kg
LGAB 100-60E	Cable ladder outside bend 90°,	100 mm	100 mm	600 mm	1100 mm	horizontal	90°	12.280 kg
LGAB 100-50E	Cable ladder outside bend 90°,	100 mm	100 mm	500 mm	1000 mm	horizontal	90°	10.450 kg
LGAB 100-20E	Cable ladder outside bend 90°,	100 mm	100 mm	200 mm	700 mm	horizontal	90°	5.830 kg



DETAIL- UND ANWENDUNGSBILDER

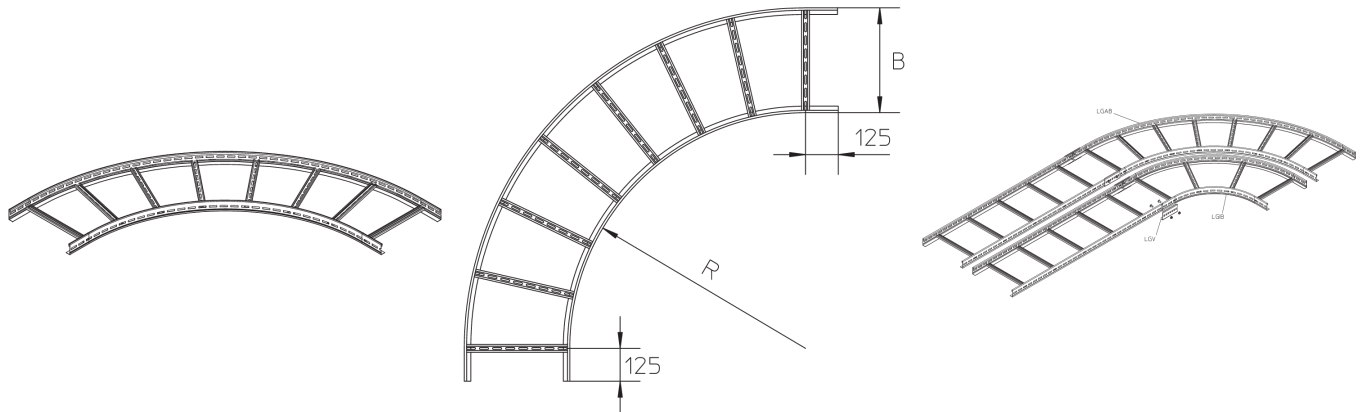

OPTIONALES ZUBEHÖR

LGV 100, LGVH 100, LGVV 100, LGTRV 100

