


LGIB 100

Cable ladder internal bend, height = 100 mm

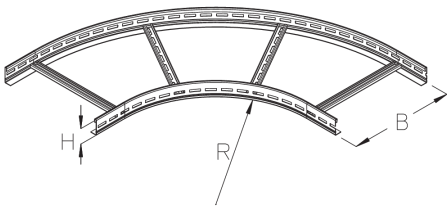


The cable ladder internal bend LGIB 100 allows the direction of cable routing to be changed horizontally by 90°. They are suitable for cable ladders with rails 100 mm high and are 200 to 600 mm wide. The bend is mounted on the cable ladders using LGV side connectors (please order separately). The inner radius of the LGIB cable ladder internal bend is 400 mm and is smaller than that of the LGAB cable ladder external bend. The cable ladder can thus be guided more tightly around curves depending on the circumstances. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

Artikel	Typ	H	H _H	B	R	direction	W	W
LGIB 100-50F	Cable ladder inside bend 90°,	100 mm	100 mm	500 mm	400 mm	horizontal	90°	6.280 kg
LGIB 100-30F	Cable ladder inside bend 90°,	100 mm	100 mm	300 mm	400 mm	horizontal	90°	4.460 kg
LGIB 100-40F	Cable ladder inside bend 90°,	100 mm	100 mm	400 mm	400 mm	horizontal	90°	5.000 kg
LGIB 100-20F	Cable ladder inside bend 90°,	100 mm	100 mm	200 mm	400 mm	horizontal	90°	3.910 kg
LGIB 100-60F	Cable ladder inside bend 90°,	100 mm	100 mm	600 mm	400 mm	horizontal	90°	6.980 kg

Artikel	Typ	H	H _H	B	R	direction	W	W
LGIB 100-40E	Cable ladder inside bend 90°,	100 mm	100 mm	400 mm	400 mm	horizontal	90°	4.710 kg
LGIB 100-50E	Cable ladder inside bend 90°,	100 mm	100 mm	500 mm	400 mm	horizontal	90°	5.910 kg
LGIB 100-20E	Cable ladder inside bend 90°,	100 mm	100 mm	200 mm	400 mm	horizontal	90°	3.680 kg
LGIB 100-60E	Cable ladder inside bend 90°,	100 mm	100 mm	600 mm	400 mm	horizontal	90°	6.560 kg
LGIB 100-30E	Cable ladder inside bend 90°,	100 mm	100 mm	300 mm	400 mm	horizontal	90°	4.190 kg

DETAIL- UND ANWENDUNGSBILDER



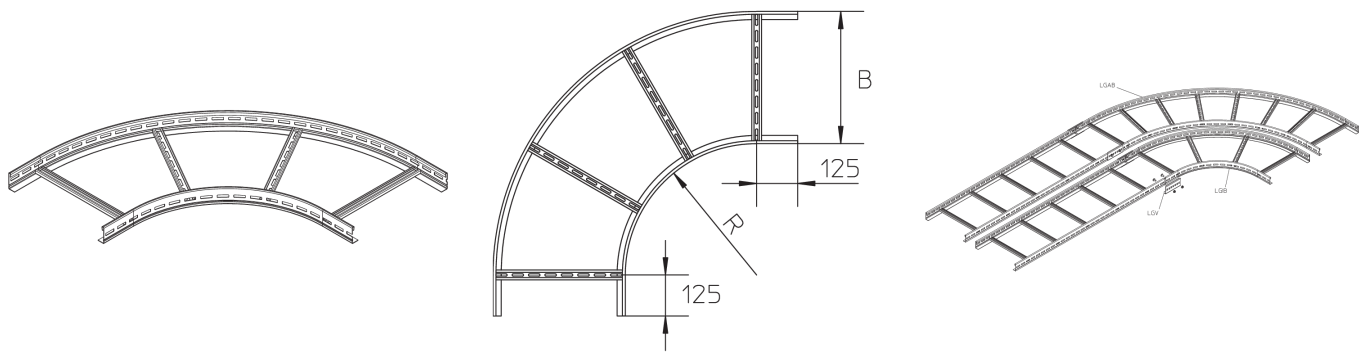

OPTIONALES ZUBEHÖR

LGV 100, LGVH 100, LGVV 100, LGTRV 100, LIBD, LIBDR

