


LGIB 60

Cable ladder internal bend, height = 60 mm

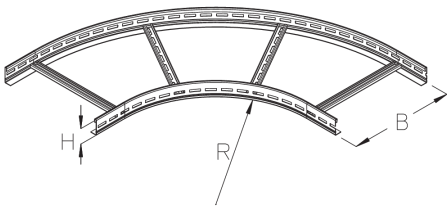


The cable ladder internal bend LGIB 60 allows the direction of cable routing to be changed horizontally by 90°. They are suitable for cable ladders with rails 60 mm high and are 200 to 600 mm wide. The bend is mounted on the cable ladders using LGV side connectors (please order separately). The inner radius of the LGIB cable ladder internal bend is 400 mm and is smaller than that of the LGAB cable ladder external bend. The cable ladder can thus be guided more tightly around curves depending on the circumstances. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

Artikel	Typ	H	H _H	B	R	direction	W	W
LGIB 60-20F	Cable ladder inside bend LGIB 60-20F	60 mm	60 mm	200 mm	400 mm	horizontal	90°	3.000 kg
LGIB 60-60F	Cable ladder inside bend LGIB 60-60F	60 mm	60 mm	600 mm	400 mm	horizontal	90°	5.780 kg
LGIB 60-40F	Cable ladder inside bend LGIB 60-40F	60 mm	60 mm	400 mm	400 mm	horizontal	90°	3.950 kg
LGIB 60-30F	Cable ladder inside bend LGIB 60-30F	60 mm	60 mm	300 mm	400 mm	horizontal	90°	3.470 kg
LGIB 60-50F	Cable ladder inside bend LGIB 60-50F	60 mm	60 mm	500 mm	400 mm	horizontal	90°	5.160 kg

Artikel	Typ	H	H _H	B	R	direction	W	W
LGIB 60-60E	Cable ladder inside bend LGIB 60-60E	60 mm	60 mm	600 mm	400 mm	horizontal	90°	5.440 kg
LGIB 60-50E	Cable ladder inside bend LGIB 60-50E	60 mm	60 mm	500 mm	400 mm	horizontal	90°	4.850 kg
LGIB 60-30E	Cable ladder inside bend LGIB 60-30E	60 mm	60 mm	300 mm	400 mm	horizontal	90°	3.270 kg
LGIB 60-20E	Cable ladder inside bend LGIB 60-20E	60 mm	60 mm	200 mm	400 mm	horizontal	90°	2.820 kg
LGIB 60-40E	Cable ladder inside bend LGIB 60-40E	60 mm	60 mm	400 mm	400 mm	horizontal	90°	3.720 kg

DETAIL- UND ANWENDUNGSBILDER



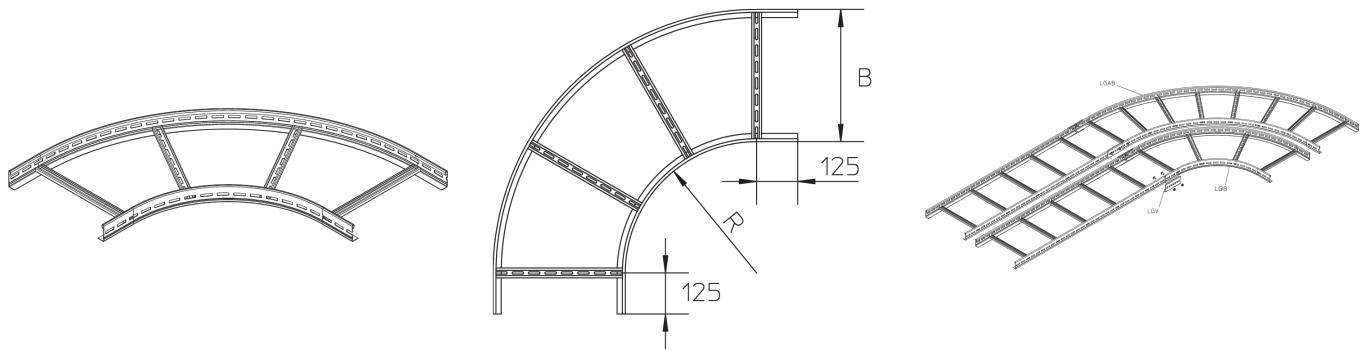

OPTIONALES ZUBEHÖR

LGV 60, LGVH 60, LGVV 60, LGTRV 60, LIBD, LIBDR

