


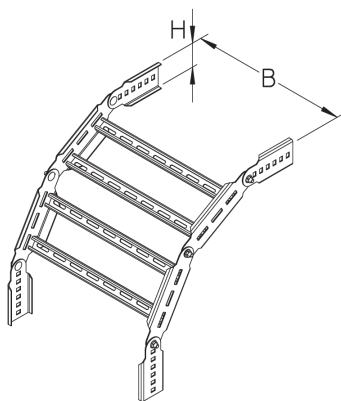

LGVB 100

Cable ladder vertical bend, height = 100 mm

The cable tray vertical bend LGVB 100 allows the direction of cable routing to be changed flexibly and vertically. They are suitable for cable ladders with rails 100 mm high and are 200 to 600 mm wide. The bend is pushed into the cable ladder and then bolted in place. The connection cable ladder is then inserted into the end of the formed part and also bolted in place. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

Artikel	Typ	H	H _H	B	direction	W	W
LGVB 100-20F	Cable ladder vertical bend	100 mm	100 mm	200 mm	rising/falling	var.	2.992 kg
LGVB 100-30F	Cable ladder vertical bend	100 mm	100 mm	300 mm	rising/falling	var.	3.292 kg
LGVB 100-40F	Cable ladder vertical bend	100 mm	100 mm	400 mm	rising/falling	var.	3.592 kg
LGVB 100-50F	Cable ladder vertical bend	100 mm	100 mm	500 mm	rising/falling	var.	3.852 kg
LGVB 100-60F	Cable ladder vertical bend	100 mm	100 mm	600 mm	rising/falling	var.	4.172 kg

Artikel	Typ	H	H _H	B	direction	W	W
LGVB 100-20E	Cable ladder vertical bend	100 mm	100 mm	200 mm	rising/falling	var.	2.788 kg
LGVB 100-30E	Cable ladder vertical bend	100 mm	100 mm	300 mm	rising/falling	var.	3.068 kg
LGVB 100-40E	Cable ladder vertical bend	100 mm	100 mm	400 mm	rising/falling	var.	3.348 kg
LGVB 100-50E	Cable ladder vertical bend	100 mm	100 mm	500 mm	rising/falling	var.	3.628 kg
LGVB 100-60E	Cable ladder vertical bend	100 mm	100 mm	600 mm	rising/falling	var.	3.908 kg

DETAIL- UND ANWENDUNGSBILDER



