


LH

Ladder bracket

The ladder brackets LH can be used to attach LGG 60 and STU 50 vertical ladders to the wall. It consists of two brackets. The distance between the ladder brackets must not exceed 1500 mm (general power supply vertical ladder). The ladder bracket is made of hot-dip galvanised steel.

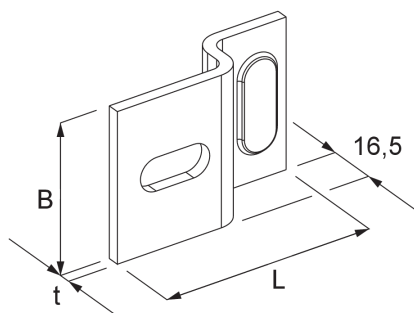

Artikel	Typ	B	L	t	W
LH F	ladder support LH F	50 mm	70 mm	4.00 mm	0.252 kg

DETAIL- UND ANWENDUNGSBILDER

